



EUROFINS PRODUCT TESTING SERVICE (SHANGHAI) CO., LTD

EMC TEST- REPORT

TEST REPORT NUMBER: EFSH20051081-IE-01-E01



Eurofins Product Testing Service (Shanghai) Co., Ltd
No. 395 West Jiangchang Road, Jing'an District,
Shanghai, 200436, P.R. China

Phone: +86-21-61819181
Fax: +86-21-61819299
Page 1 of 44

TABLE OF CONTENTS
1 Contents

1	Contents	2
2	General Information	3
2.1	Notes	3
2.2	Testing laboratory	4
2.3	Details of approval holder	5
2.4	Application details	5
2.5	EUT information	5
2.6	Test standards	5
3	Technical test	6
3.1	Summary of test results	6
3.2	Test environment	6
3.3	Test mode	6
3.4	List of Test equipment	7
3.5	Test results	9
4	Emission Test	10
4.1	Conducted Emission	10
4.2	Radiated electromagnetic disturbances	15
4.3	Radiated disturbance	22
4.4	Voltage Changes, Voltage Fluctuations and Flicker	27
5	Immunity Test	29
5.1	Performance Criteria Description in Clause 4 of IEC 61547	29
5.2	Conditions during testing	29
5.3	ESD	30
5.4	Radio frequency electromagnetic fields	31
5.5	Electrical Fast Transients	32
5.6	Injected currents(RF continues conducted)	33
5.7	Surge Immunity	34
5.8	Voltage dips and Interruption	35
6	Test setup Photos	36
7	EUT Photos	40

2 General Information

2.1 Notes


The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

Eurofins Product Testing Service (Shanghai) Co., Ltd. is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.


The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the Eurofins Product Testing Service (Shanghai) Co., Ltd.

This document is subject to the General Terms and Conditions and the Testing and Certification System of Eurofins Product Testing Service (Shanghai) Co., Ltd. available on request or accessible at <https://www.eurofins.cn/en/eurofins-consumer-product-testing-china/resource-centre/general-terms/>.

Operator:

2020-05-20		Perry Li / Project Engineer	
Date	Eurofins-Lab.	Name / Title	Signature

Technical responsibility for area of testing:

2020-05-20		Andy Li / Supervisor	
Date	Eurofins	Name / Title	Signature

2.2 Testing laboratory

Eurofins Product Testing Service (Shanghai) Co., Ltd

No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China

Telephone : +86-21-61819181

Fax : +86-21-61819299

Test location, where different:

Name : Shenzhen SEM.Test Technology Co., Ltd.

Address : 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian'er Road, Block 70,
Bao'an District, Shenzhen, Guangdong, China

Telephone : +86-755-3366 3308

Fax : +86-755-3366 3309

All items were prepared and tested at Shenzhen SEM.Test Technology Co., Ltd.

2.3 Details of approval holder

Name : Foshan Electrical and Lighting Co., Ltd.
Address : 64 North Fenjiang Road, Foshan, Guangdong, China
Telephone : ./.
Fax : ./.

2.4 Application details

Date of receipt of test item : 2019-03-26
Date of test : 2019-04-01 to 2019-04-03
Date of re-evaluation : 2020-05-20

2.5 EUT information

Product type : LED Tube Lamps
Model name : T8-8-XX/C113/22, T8-9-XX/C113/22, T8-10-XX/C113/22,
T8-14-XX/C113/23, T8-16-XX/C113/24, T8-18-XX/C113/24,
T8-20-XX/C113/24, T8-22-XX/C113/24, T8-20-XX/C113/25,
T8-22-XX/C113/25, T8-24-XX/C113/25, LEDT09G13C,
LEDT18G13C
(The "XX" means colour temperature, it can be integer number from
30 to 65, indicating the colour temperature is 3000K to 6500K)
Brand name : FSL, ingelec
Serial number : ./.
Ratings : 180-265V~, 50/60Hz, Max.24W
Test voltage : 220-240V~, 50/60Hz (230V~, 50Hz as the worst condition to be
recorded)
Additional information :
1. The product is LED Tube Lamps.
2. Models T8-9-XX/C113/22, T8-10-XX/C113/22, T8-14-XX/C113/23, T8-18-XX/C113/24, T8-20-XX/C113/24,
T8-8-XX/C113/22, T8-16-XX/C113/24, T8-20-XX/C113/25 are the same except the quantity of LED, the
length of lamp and ratings.
Models T8-22-XX/C113/24, T8-22-XX/C113/25, T8-24-XX/C113/25 are the same except the quantity of
LED, the length of lamp and ratings.
3. Models T8-20-65/C113/24 and T8-24-65/C113/25 were selected to test full items.

2.6 Test standards

Technical standard :

CISPR 15: 2013+A1: 2015

IEC 61547: 2009

IEC 61000-3-2: 2014

IEC 61000-3-3: 2013

3 Technical test

3.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified were ascertained in the course of the tests performed.



Remark:

The test results referred from test report No. EFSH19032330-IE-01-E01, with below differences:.

Add new models LEDT09G13C and LEDT18G13C.

Model LEDT09G13C is identical to model T8-9-XX/C113/22 except model name.

Model LEDT18G13C is identical to model T8-18-XX/C113/24 except model name..

After review, no additional tests need to be done. The result of compliance remains effective.

3.2 Test environment

Temperature : 20 ... 24°C

Relative humidity content : 30 ... 55%

Air pressure : 100 ... 103kPa

3.3 Test mode

Lighting

3.4 List of Test equipment

(Refer to the latest test date: 2019-04-01 to 2019-04-03)

Description	Manufacturer	Model	Serial Number	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2019-05-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-05-21
Amplifier	Agilent	8447F	3113A06717	2019-05-21
Amplifier	C&D	PAP-1G18	2002	2019-05-21
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2020-06-07
Horn Antenna	ETS	3117	00086197	2020-06-07
Loop Antenna	Schwarz beck	FMZB 1516	9773	2020-06-07
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-05-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-05-21
AC LISN	Schwarz beck	NSLK8126	8126-224	2019-05-21
DC LISN	Schwarz beck	NNBM8126D	279	2019-05-21
8-WIRE LISN	Schwarz beck	8158	CAT3-8158-0059	2019-05-21
8-WIRE LISN	Schwarz beck	8158	CAT5-8158-0117	2019-05-21
Digital Power Analyzer	California Instrument	PACS-1	72831	2019-05-21
Power Source	California Instrument	5001iX	25965	2019-05-21
ESD Generator	LIOGCEL	ESD-203B	0170901	2019-05-21
Signal Generator	Rohde & Schwarz	SMT03	100059	2019-05-21
Voltage Probe	Rohde & Schwarz	URV5-Z2	100013	2019-05-21
Power Amplifier	AR	150W1000	300999	2019-05-21
Power Amplifier	AR	25S1G4AM1	305993	2019-05-21
Transient 2000	EMC PARTNER	TRA2000	863	2019-05-21
CS Immunity Tester	SCHAFFNER	NSG2070	1123	2019-05-21
CDN	Luthi	CDNL-801	2655	2019-05-21
Attenuator	EMCI	MA-5100/6BF2	1009	2019-05-21
EMC PRO	KEYTEK	EMCPro	0509124	2019-05-21
Coil	KEYTEK	F-1000-4-8	0533	2019-05-21
Anechoic chamber	Albatross Projects	MCDC	----	2019-05-21
CS Generator	MARCONI	2024	112260/042	2019-08-12
Attenuator	FRANKONIA	75-A-FFN-06	1001698	2019-08-12
CDN	FRANKONIA	CDN M2+M3	A3027019	2019-08-12
Signal Generator	R&S	SMB100A	105942	2019-09-10

Test Report No.: EFSH20051081-IE-01-E01

Eurofins Product Testing Service (Shanghai) Co., Ltd
No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China

RF Power Amplifier	BONN Elektronik	BLWA0830-160/100/40D	128740	2019-09-10
RF Power Amplifier	NJNT	NTWPAS-2560025	2560025	2019-09-10
Gestockte Breitband(S tacked) Log.-per.Antenna	SCHWARZBECK	STLP9128D	043	2019-09-10
Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2019-09-10
Power Meter	R&S	NRP2	102031	2019-09-10

3.5 Test results

 1st test

 test after modification

 production test

Test case	Subclause	Required	Test passed	Test failed
Conducted Emission	Clause 4.3 of CISPR 15	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated electromagnetic disturbances	Clause 4.4 of CISPR 15	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated disturbance	Clause 4.4.2 of CISPR 15	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Harmonic Current Emissions	IEC 61000-3-2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Voltage Changes, Voltage Fluctuations and Flicker	IEC 61000-3-3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Electrostatic Discharge	Clause 5.2 of IEC61547 & IEC 61000-4-2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radio frequency electromagnetic fields	Clause 5.3 of IEC 61547 & IEC 61000-4-3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power frequency magnetic fields	Clause 5.4 of IEC 61547 & IEC 61000-4-8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Electrical Fast Transients	Clause 5.5 of IEC 61547 & IEC 61000-4-4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Injected currents (RF common mode)	Clause 5.6 of IEC 61547 & IEC 61000-4-6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Surge immunity	Clause 5.7 of IEC 61547 & IEC 61000-4-5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Voltage dips and short interruption	Clause 5.8 of IEC 61547 & IEC 61000-4-11	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Note:

1. Power frequency magnetic fields test was not required as the EUT did not contained components susceptible to magnetic fields.
2. The EUT is LED light power < 25W, which doesn't belong to discharge lighting equipment, thus harmonic current emission test is not applicable according to EN 61000-3-2 requirement.

4 Emission Test

4.1 Conducted Emission

This clause lays down the general requirements for the measurement of disturbance voltage produced at the terminals of apparatus.


4.1.1 Limits

Frequency range MHz	At mains terminals dB (μ V)	
	Quasi-peak	Average
0.009 to 0.05	110	--
0.05 to 0.15	90 to 80	--
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note1: The limit decreases linearly with the logarithm of the frequency in the range 50k to 150kHz and 150 kHz to 0.5 MHz.

Note2: The lower limit is applicable at the transition frequency.

4.1.2 Measurement procedure

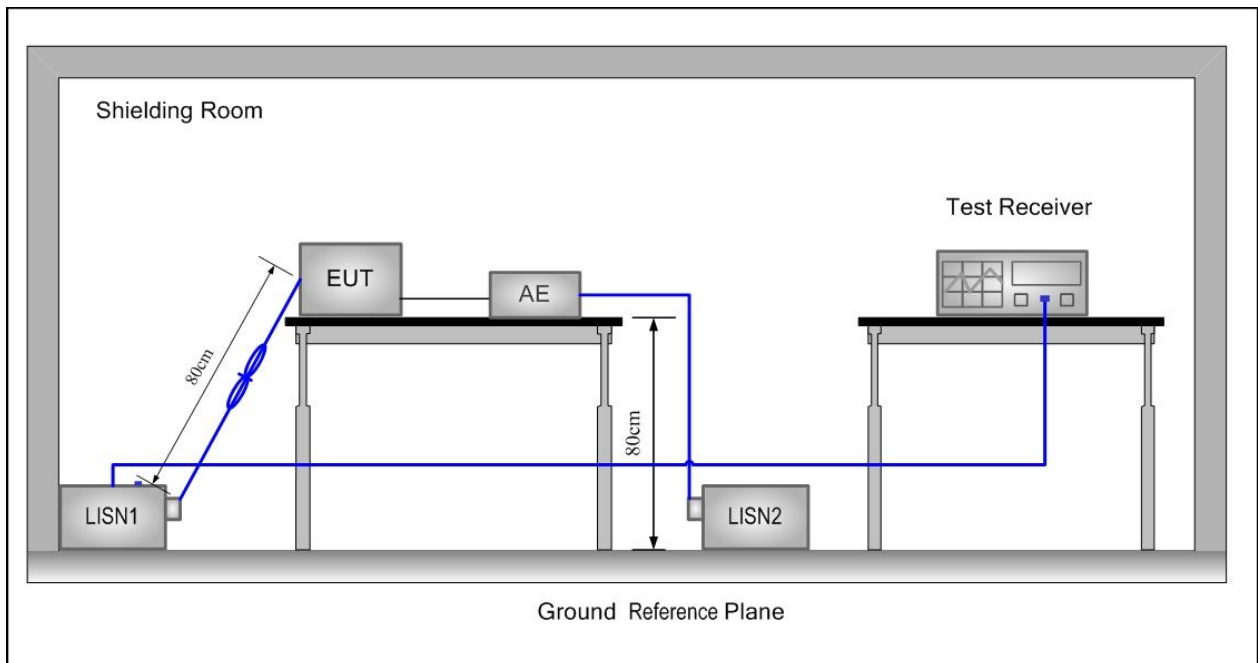

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN (Line Impedance Stabilization Network) which provides a $(50 \mu\text{H} + 5 \Omega) \parallel 50 \Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured.

- The table top EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- Before get the final emission results with quasi-peak(QP) detector and average(AV) detector, a pre-scan was performed with the peak(PK) and average(AV) detector to find out the maximum emission data plots of the EUT.


4.1.3 Measurement uncertainty

U_{lab}(cond) = 1.8dB at 95% level of confidence, k=2

4.1.4 Results -Measurement Data

Model T8-20-65/C113/24

Job No.:	CE	Phase:	L1
Standard:	EN55015 Conduction(QP)	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	2019-4-1
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	11:28:35
Note:			

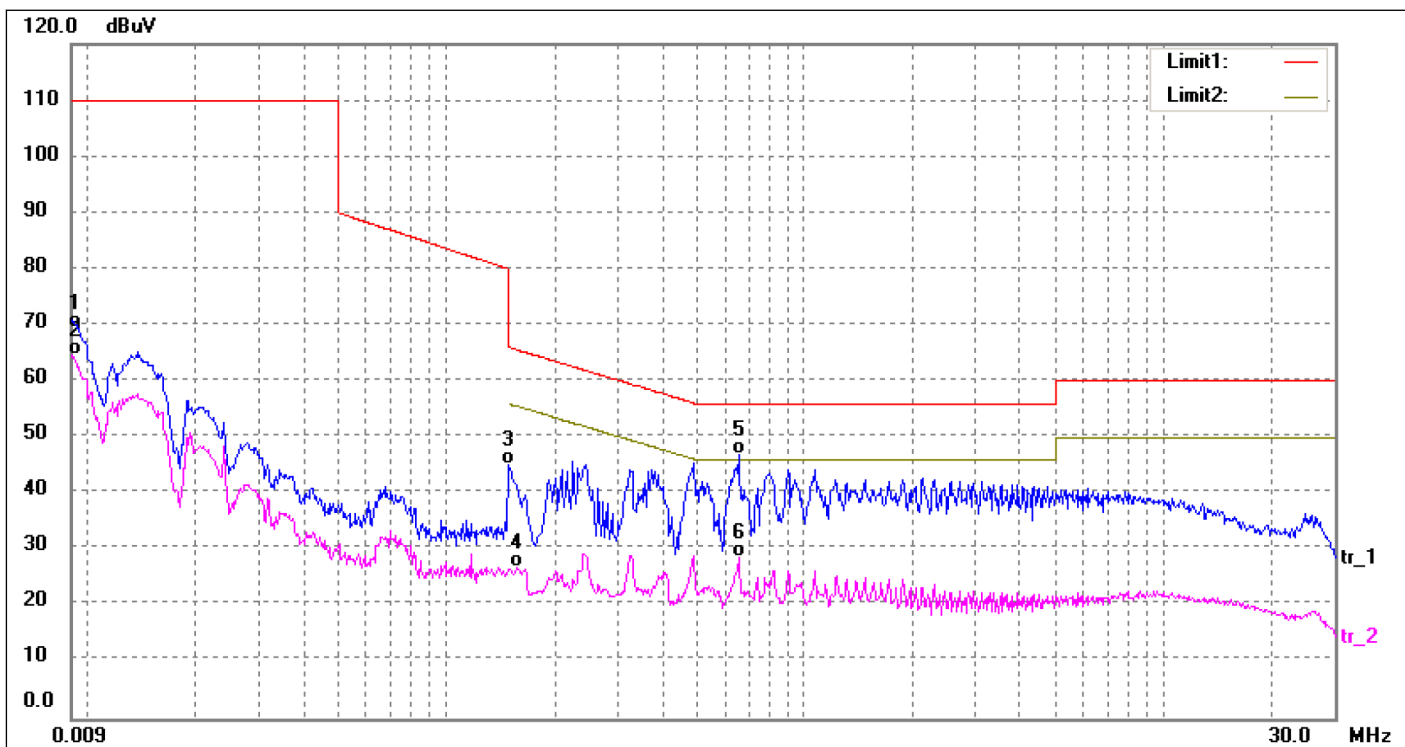


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Over (dB)	Detector
1	0.0094	58.87	10.62	69.49	110.00	-40.51	QP
2	0.0094	53.92	10.62	64.54	78.99	-14.45	AVG
3	0.1499	34.52	10.61	45.13	66.00	-20.87	QP
4	0.1580	16.38	10.61	26.99	55.56	-28.57	AVG
5*	0.6540	36.42	10.64	47.06	56.00	-8.94	QP
6	0.6540	18.07	10.64	28.71	46.00	-17.29	AVG

Test Report No.: EFSH20051081-IE-01-E01


Eurofins Product Testing Service (Shanghai) Co., Ltd
No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China

Job No.:	CE	Phase:	N
Standard:	EN55015 Conduction(QP)	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	2019-4-1
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	11:21:35
Note:			

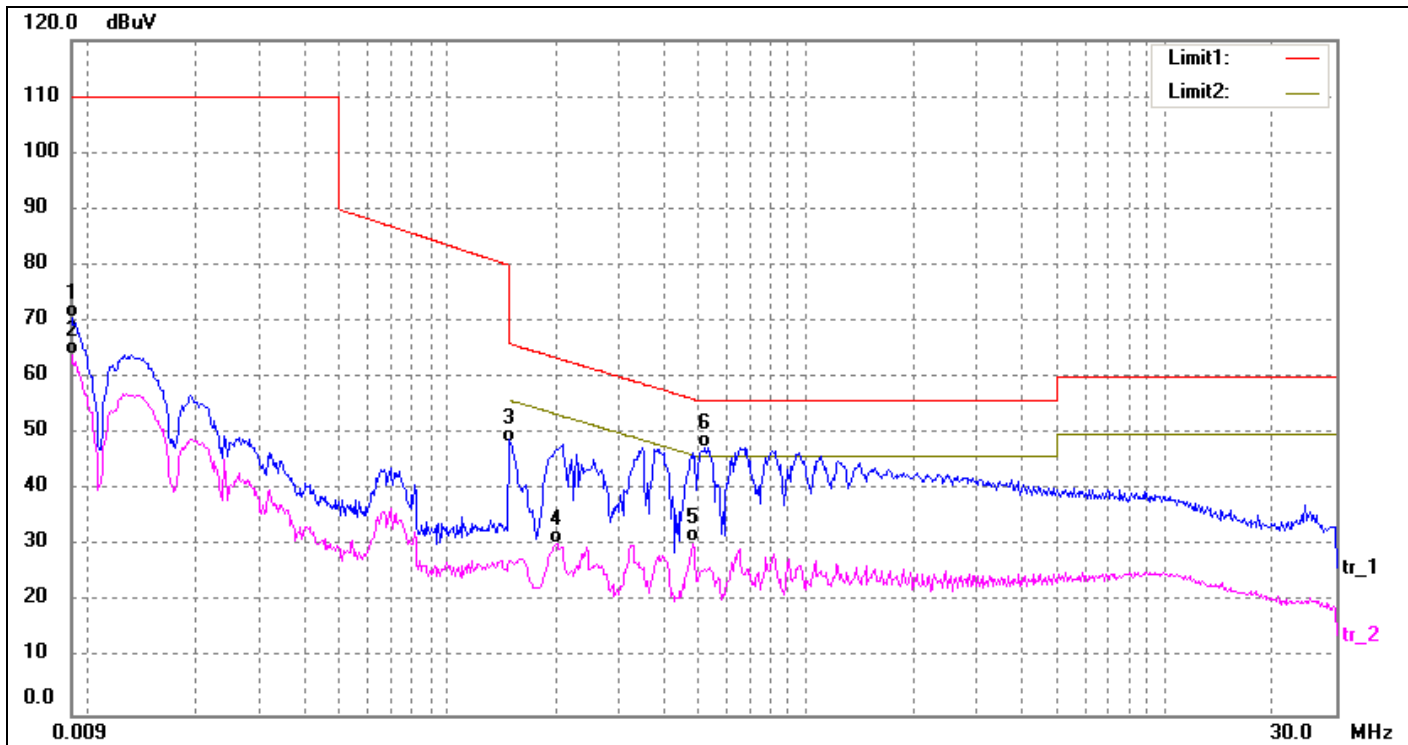


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Over (dB)	Detector
1	0.0090	60.13	10.62	70.75	110.00	-39.25	QP
2	0.0090	53.32	10.62	63.94	79.35	-15.41	AVG
3	0.1502	37.82	10.61	48.43	65.98	-17.55	QP
4	0.2020	19.96	10.61	30.57	53.52	-22.95	AVG
5	0.4860	19.98	10.62	30.60	46.24	-15.64	AVG
6*	0.5260	37.04	10.62	47.66	56.00	-8.34	QP

Job No.:	CE	Phase:	L1
Standard:	EN55015 Conduction(QP)	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	2019-4-1
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	11:37:10
Note:			

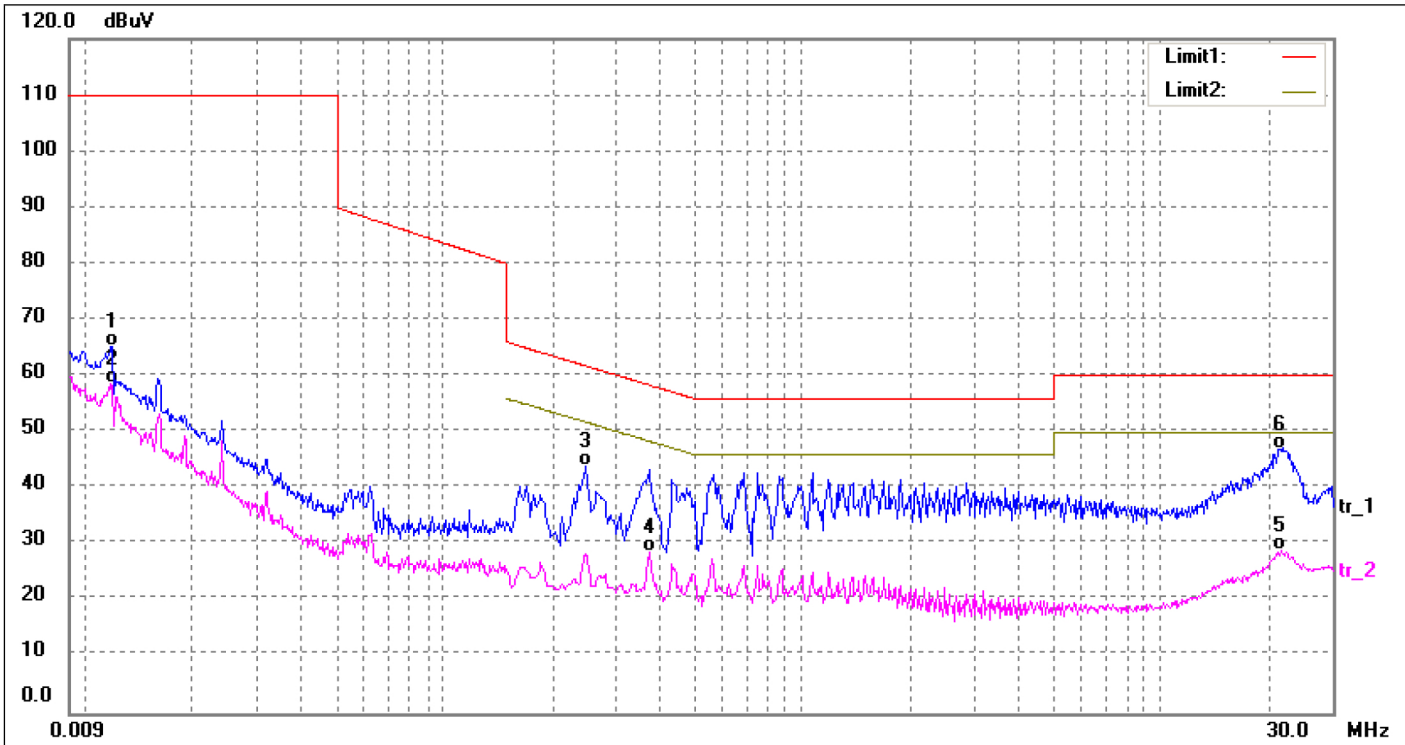

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Over (dB)	Detector
1	0.0119	54.68	10.63	65.31	110.00	-44.69	QP
2	0.0119	48.05	10.63	58.68	77.05	-18.37	AVG
3	0.2500	33.42	10.61	44.03	61.76	-17.73	QP
4	0.3740	18.04	10.62	28.66	48.41	-19.75	AVG
5	21.6260	18.31	10.77	29.08	50.00	-20.92	AVG
6*	21.8420	36.32	10.78	47.10	60.00	-12.90	QP

Job No.:	CE	Phase:	N
Standard:	EN55015 Conduction(QP)	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	2019-4-1
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	11:42:02
Note:			

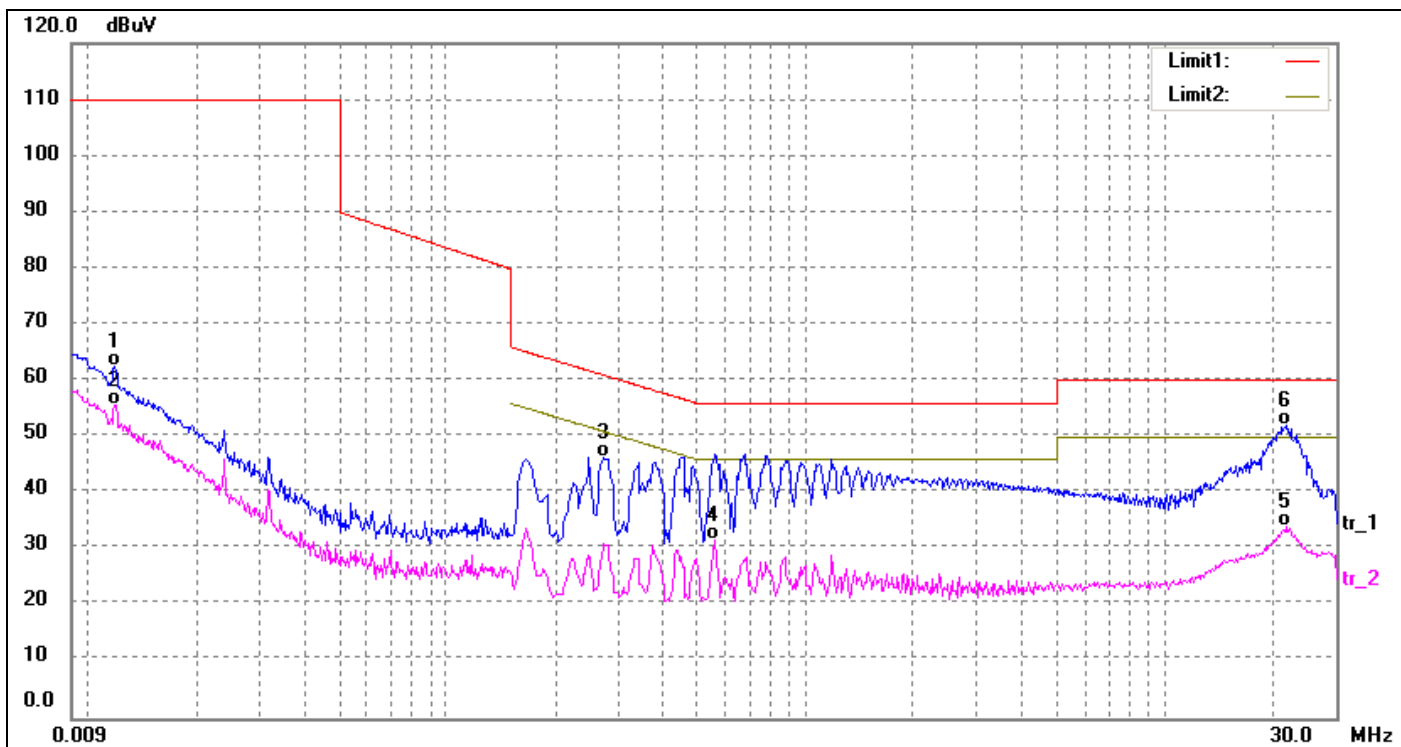

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Over (dB)	Detector
1	0.0120	51.85	10.63	62.48	110.00	-47.52	QP
2	0.0120	45.04	10.63	55.67	76.98	-21.31	AVG
3	0.2740	35.74	10.61	46.35	61.00	-14.65	QP
4	0.5580	21.17	10.63	31.80	46.00	-14.20	AVG
5	21.8460	23.41	10.78	34.19	50.00	-15.81	AVG
6*	22.0340	41.26	10.78	52.04	60.00	-7.96	QP

4.2 Radiated electromagnetic disturbances


This clause lays down the general requirements for the magnetic component of the radiated disturbance field strength in the frequency range 9 kHz to 30 MHz

4.2.1 Limits

Frequency range Hz	Limits for loop diameter dB (μ A)
	2 m
9 kHz to 70 kHz	88
70 kHz to 150 kHz	88 to 58
150 kHz to 3 MHz	58 to 22
3 MHz to 30 MHz	22

Note: At the transition frequency, the lower limit applies.
Decreasing linearly with the logarithm of the frequency.
Increasing linearly with the logarithm of the frequency.

4.2.2 Measurement procedure

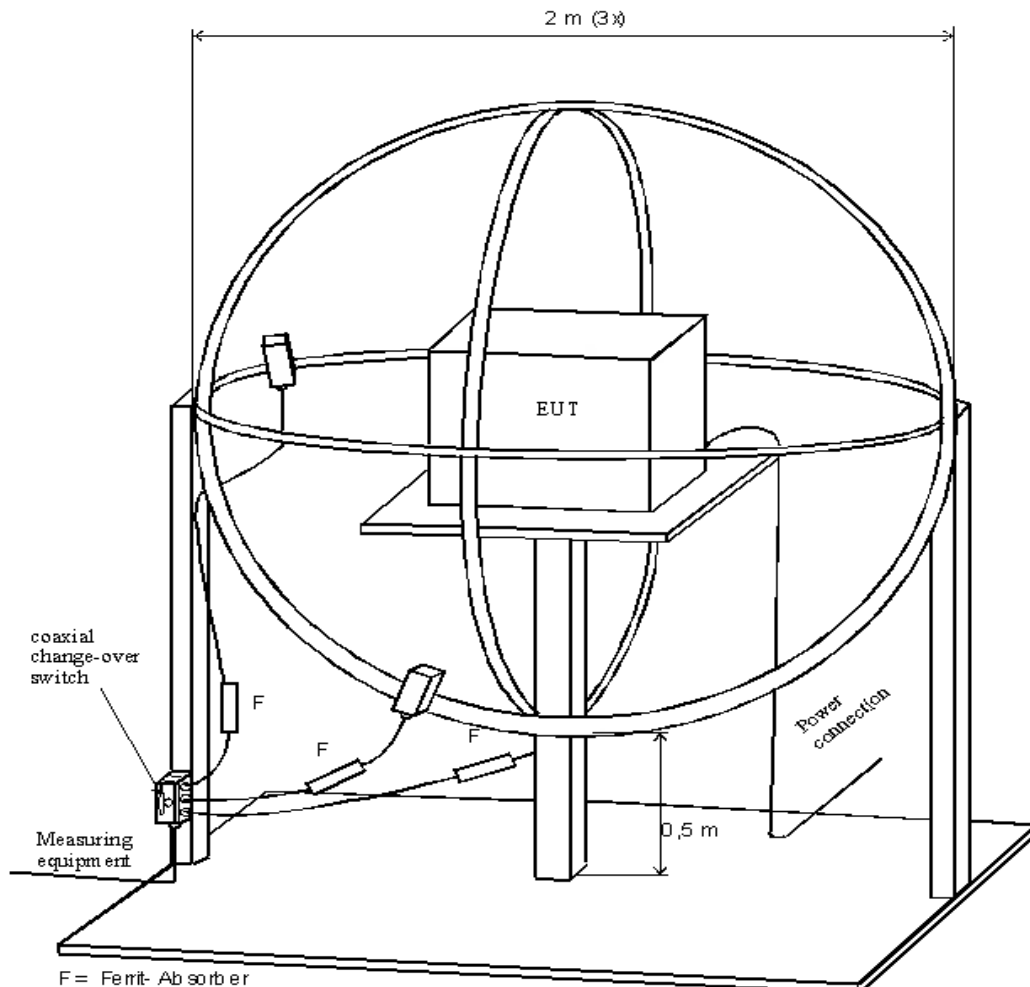

Test Report No.: EFSH20051081-IE-01-E01


Eurofins Product Testing Service (Shanghai) Co., Ltd
No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China

The EUT is placed in the centre of the loop antenna system. The current induced by the magnetic field from the EUT into each of the three large loop antennas of the loop antenna system is measured by connecting the current probe of the large loop antenna to a measuring receiver. During the measurements the EUT remains in a fixed position. Before get the final emission results with quasi-peak (QP) detector, a pre-scan was performed with the peak (PK) to find out the maximum emission data plots of the EUT.

4.2.3 Results


Model T8-20-65/C113/24

Job No.:	CE	Phase:	X
Standard:	EN 55015 Three Loop	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	19/04/02/
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	10/24/36
Note:			

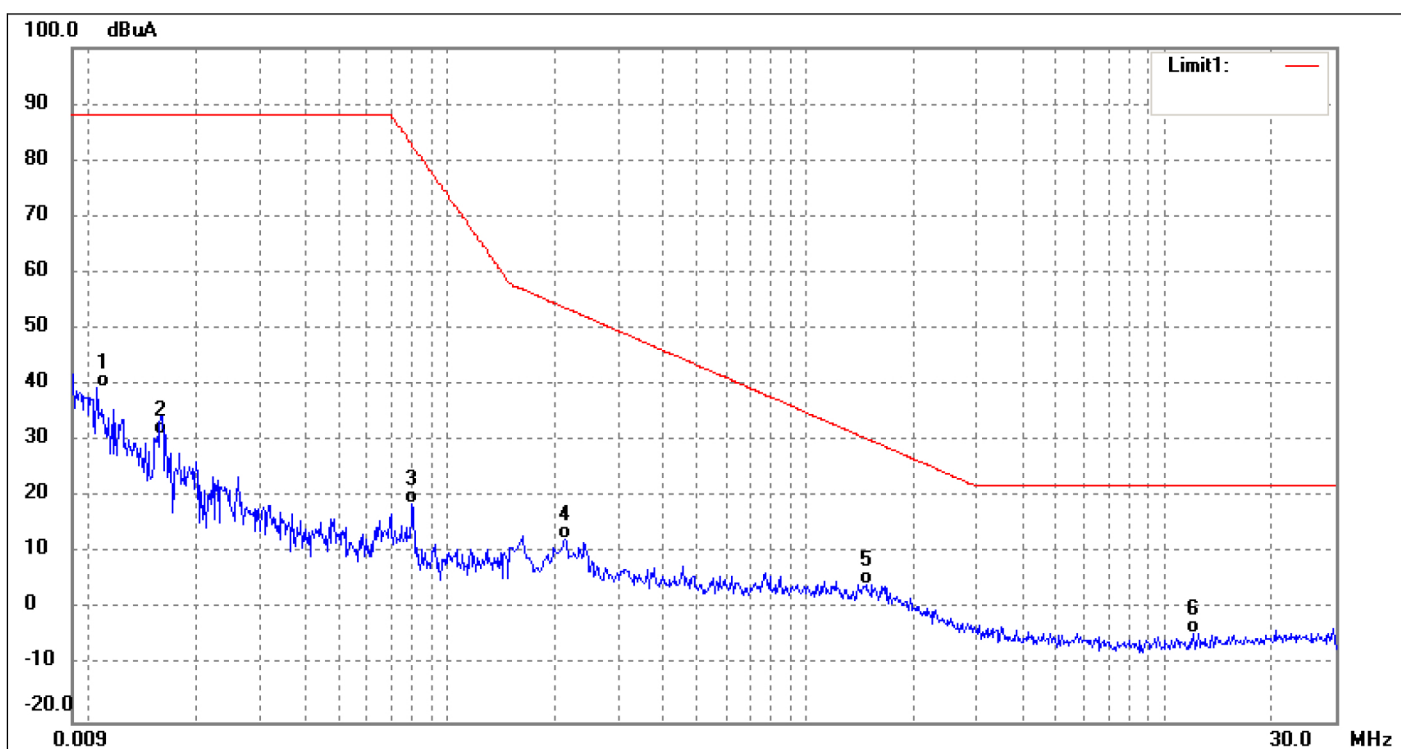


No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Over (dB)	Detector
1	0.0105	1.02	38.64	39.66	88.00	-48.34	QP
2	0.0164	-3.77	34.86	31.09	88.00	-56.91	QP
3	0.0804	-3.29	22.15	18.86	82.55	-63.69	QP
4	0.2140	-8.00	20.64	12.64	53.73	-41.09	QP
5*	1.4700	-15.82	20.29	4.47	30.57	-26.10	QP
6	12.0780	-24.72	20.47	-4.25	22.00	-26.25	QP

Job No.:	CE	Phase:	Y
Standard:	EN 55015 Three Loop	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	19/04/02/
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	10/28/23
Note:			

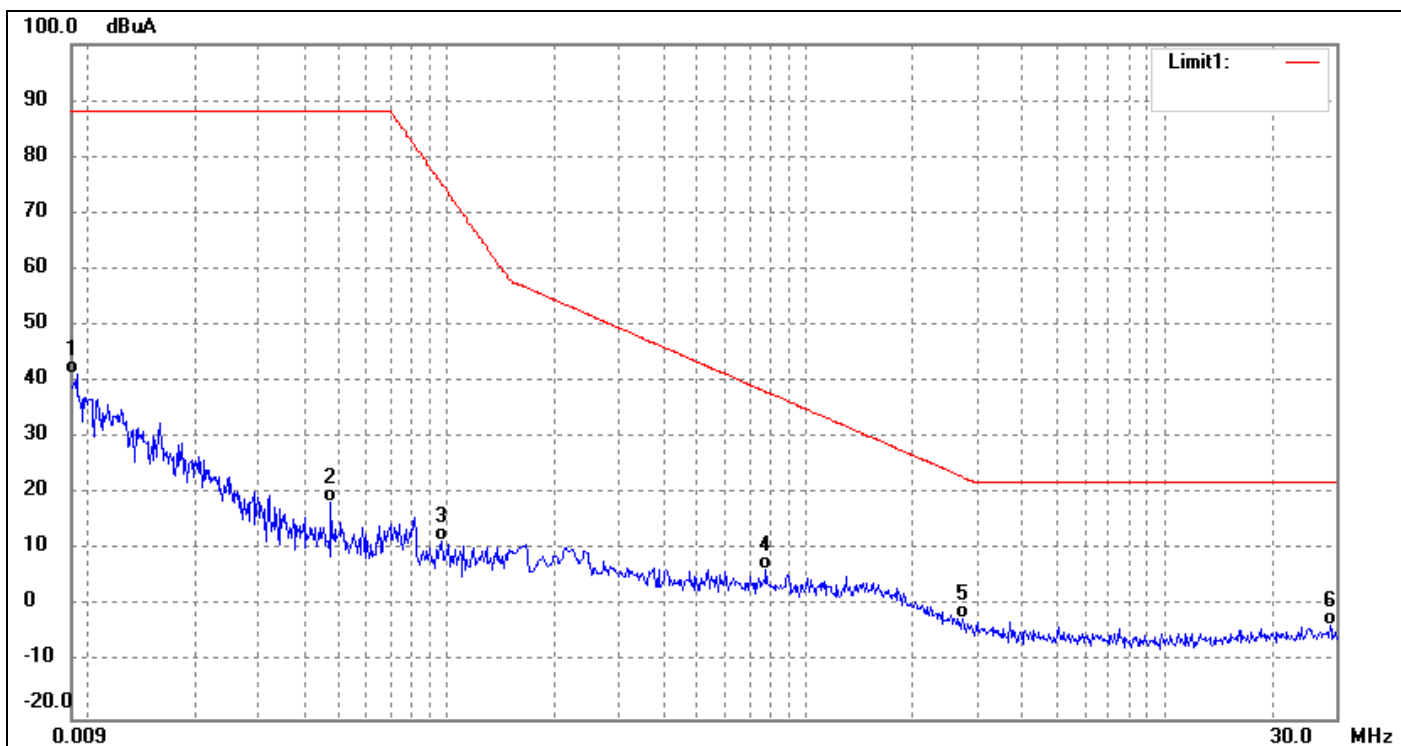

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Over (dB)	Detector
1	0.0093	1.73	39.54	41.27	88.00	-46.73	QP
2	0.0476	-5.89	24.42	18.53	88.00	-69.47	QP
3	0.0976	-10.10	21.63	11.53	74.92	-63.39	QP
4	0.7740	-13.60	20.07	6.47	38.28	-31.81	QP
5*	2.7300	-22.78	20.60	-2.18	23.13	-25.31	QP
6	28.9020	-24.64	21.26	-3.38	22.00	-25.38	QP


Job No.:	CE	Phase:	Z
Standard:	EN 55015 Three Loop	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	19/04/02/
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	10/34/31
Note:			

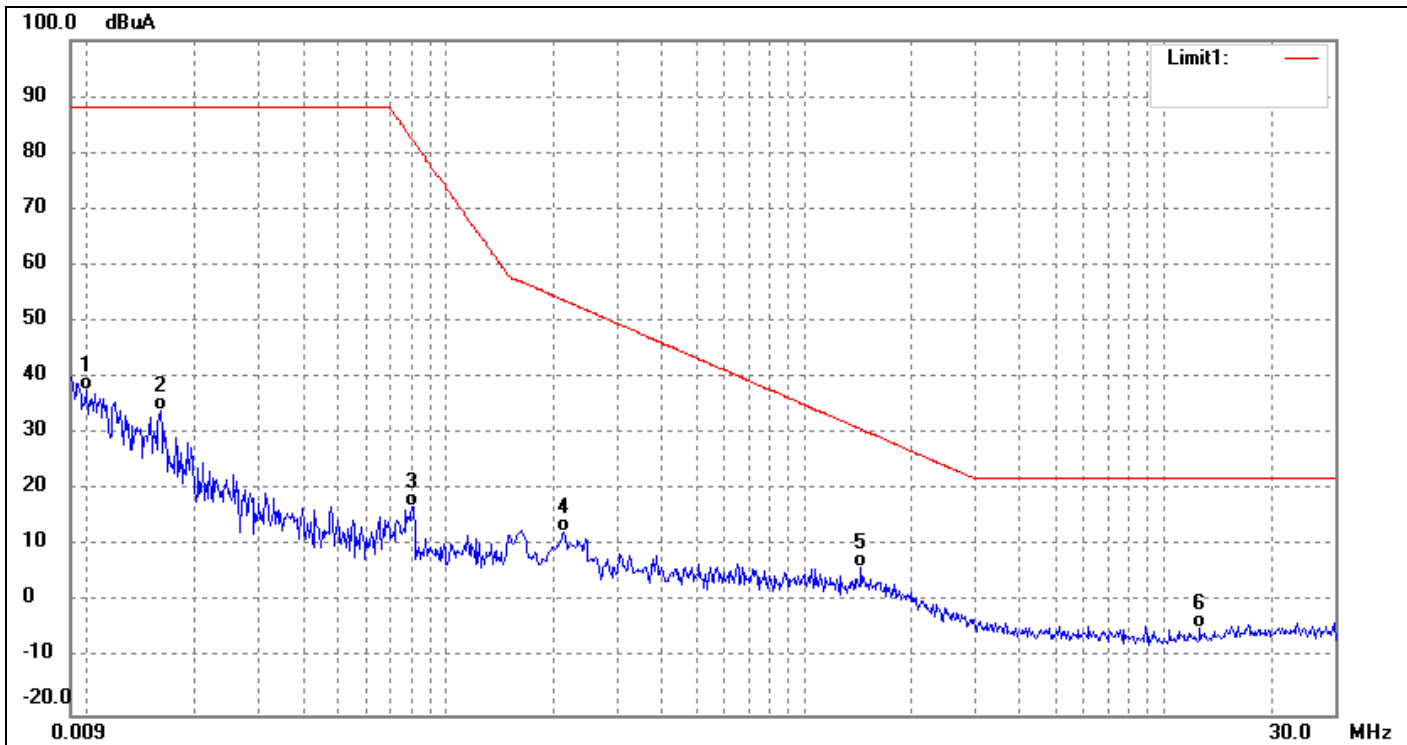

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Over (dB)	Detector
1	0.0100	-1.17	38.96	37.79	88.00	-50.21	QP
2	0.0160	-0.87	35.12	34.25	88.00	-53.75	QP
3	0.0806	-5.07	22.14	17.07	82.44	-65.37	QP
4	0.2140	-8.17	20.64	12.47	53.72	-41.25	QP
5*	1.4340	-13.94	20.28	6.34	30.87	-24.53	QP
6	12.6780	-25.20	20.53	-4.67	22.00	-26.67	QP

Model T8-24-65/C113/25

Job No.:	CE	Phase:	X
Standard:	EN 55015 Three Loop	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	19/04/02/
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	10/15/08
Note:			

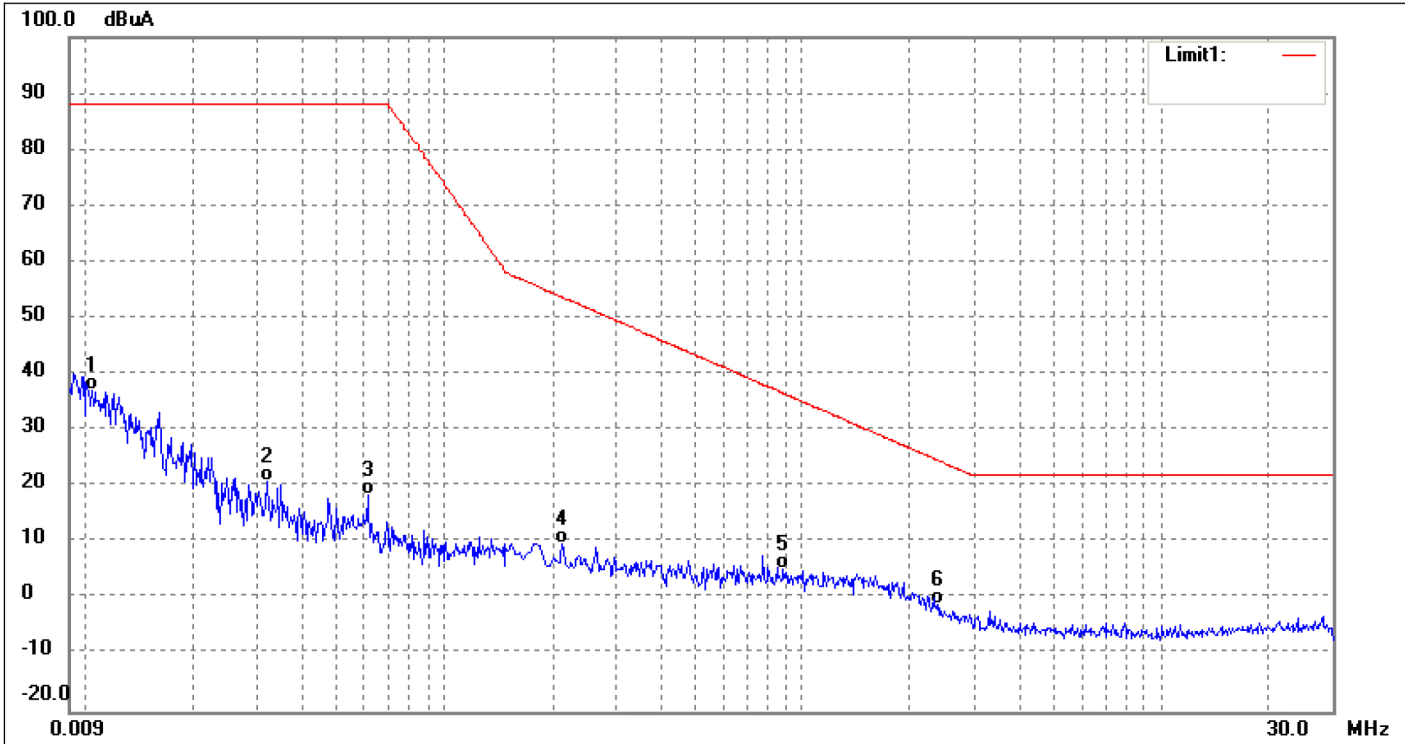


No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Over (dB)	Detector
1	0.0104	-1.53	38.70	37.17	88.00	-50.83	QP
2	0.0321	-7.05	28.14	21.09	88.00	-66.91	QP
3	0.0615	-4.49	22.99	18.50	88.00	-69.50	QP
4	0.2140	-10.93	20.64	9.71	53.72	-44.01	QP
5	0.8860	-14.70	20.06	5.36	36.65	-31.29	QP
6*	2.3699	-21.43	20.58	-0.85	24.83	-25.68	QP

Test Report No.: EFSH20051081-IE-01-E01


 Eurofins Product Testing Service (Shanghai) Co., Ltd
 No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China

Job No.:	CE	Phase:	Y
Standard:	EN 55015 Three Loop	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	19/04/02/
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	10/10/39
Note:			

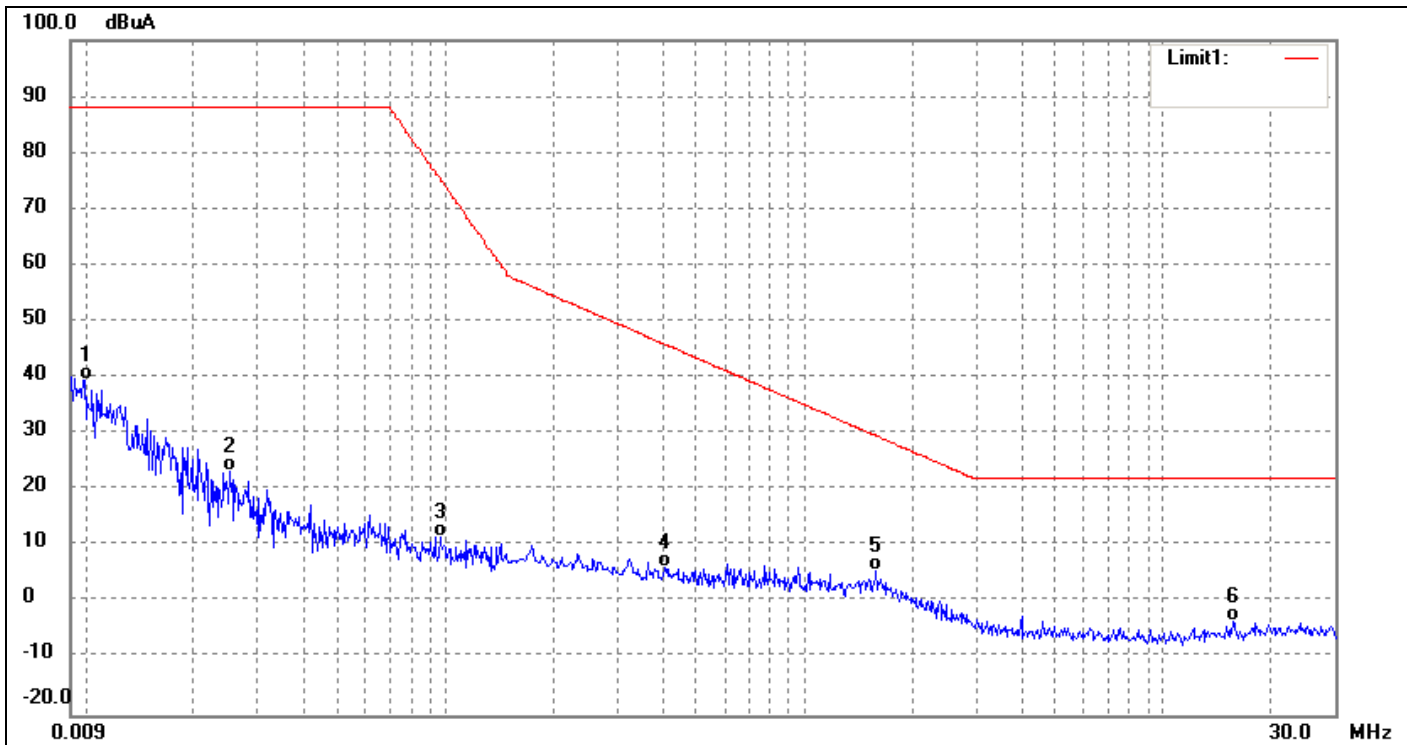

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Over (dB)	Detector
1	0.0098	0.43	39.14	39.57	88.00	-48.43	QP
2	0.0251	-7.21	30.70	23.49	88.00	-64.51	QP
3	0.0965	-10.09	21.66	11.57	75.36	-63.79	QP
4	0.4100	-14.22	20.35	6.13	45.92	-39.79	QP
5*	1.5820	-14.81	20.35	5.54	29.69	-24.15	QP
6	15.6260	-24.18	20.82	-3.36	22.00	-25.36	QP

Job No.:	CE	Phase:	Z
Standard:	EN 55015 Three Loop	Power Source:	AC 230V/50Hz
Test item:	Conduction Test	Date:	19/04/02/
Temp.(°C)/Hum.(%RH):	23.5°C/55%RH	Time:	10/05/16
Note:			

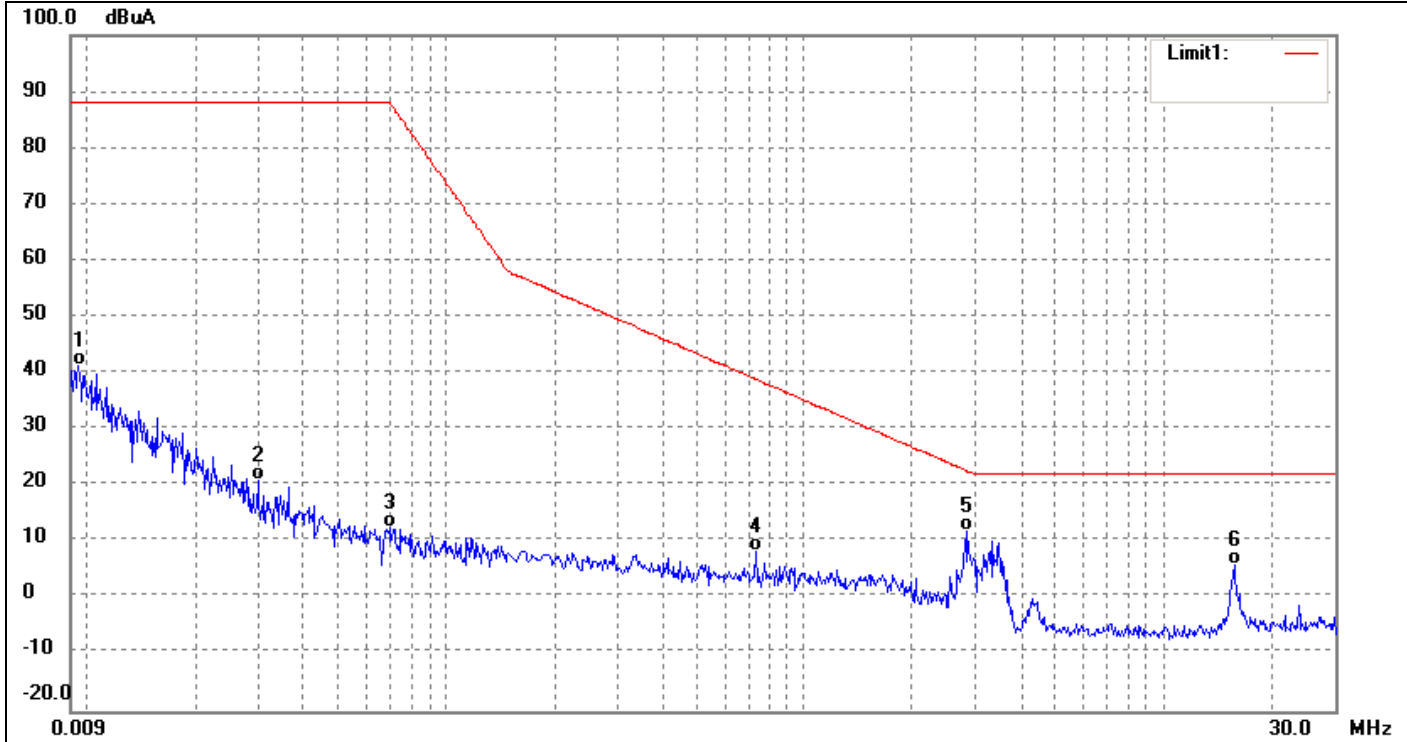

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Over (dB)	Detector
1	0.0095	1.96	39.41	41.37	88.00	-46.63	QP
2	0.0300	-7.97	28.91	20.94	88.00	-67.06	QP
3	0.0696	-10.09	22.63	12.54	88.00	-75.46	QP
4	0.7340	-11.86	20.09	8.23	38.91	-30.68	QP
5*	2.8380	-8.69	20.60	11.91	22.67	-10.76	QP
6	15.6980	-14.85	20.83	5.98	22.00	-16.02	QP

4.3 Radiated disturbance


This clause lays down the general requirements for the measurement of Radiated disturbance produced at the space of apparatus.

4.3.1 Limits

Frequency range	Quasi-peak limits at 10m	Quasi-peak limits at 3m
MHz	dB ($\mu\text{V}/\text{m}$)	dB ($\mu\text{V}/\text{m}$)
30 to 230	30	40
230 to 300	37	47

At transitional frequencies the lower limit applies.

4.3.2 Measurement procedure

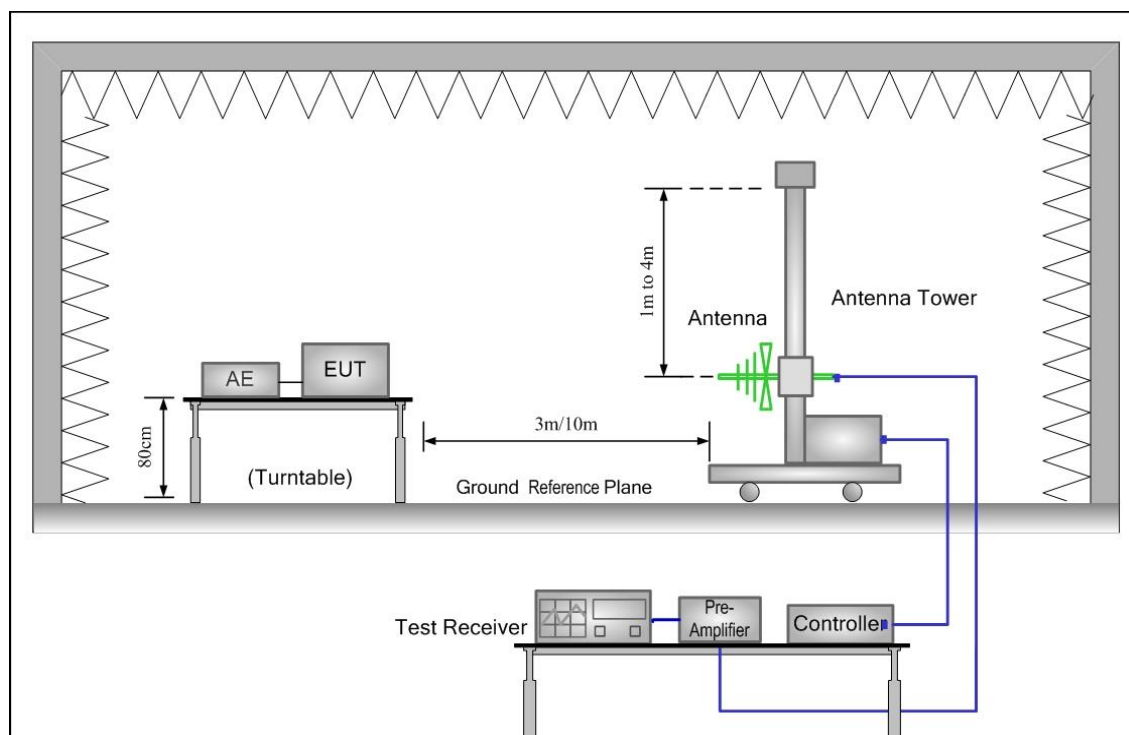

1. The radiated emissions test was conducted in a semi-anechoic chamber. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
2. Before get the final emission results with quasi-peak(QP) detector, a pre-scan was performed with the peak(PK) detector to find out the maximum emission data plots of the EUT.
3. The frequencies of maximum emission were determined in the final radiated emissions measurement, the physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. Test was performed on subcontractor at 3 m distance.


4.3.3 Measurement uncertainty

U_{lab}(cond) = 3.9dB at 95% level of confidence, k=2

4.3.4 Results

Model T8-24-65/C113/25

Job No.:	RE	Polarization:	Horizontal
Standard:	EN55015	Power Source:	AC 230V/50Hz
Test item:	Radiation Test	Date:	2019-4-1
Temp.(C)/Hum.(%RH):	25(C)/55%RH	Time:	15:54:04
Note:			

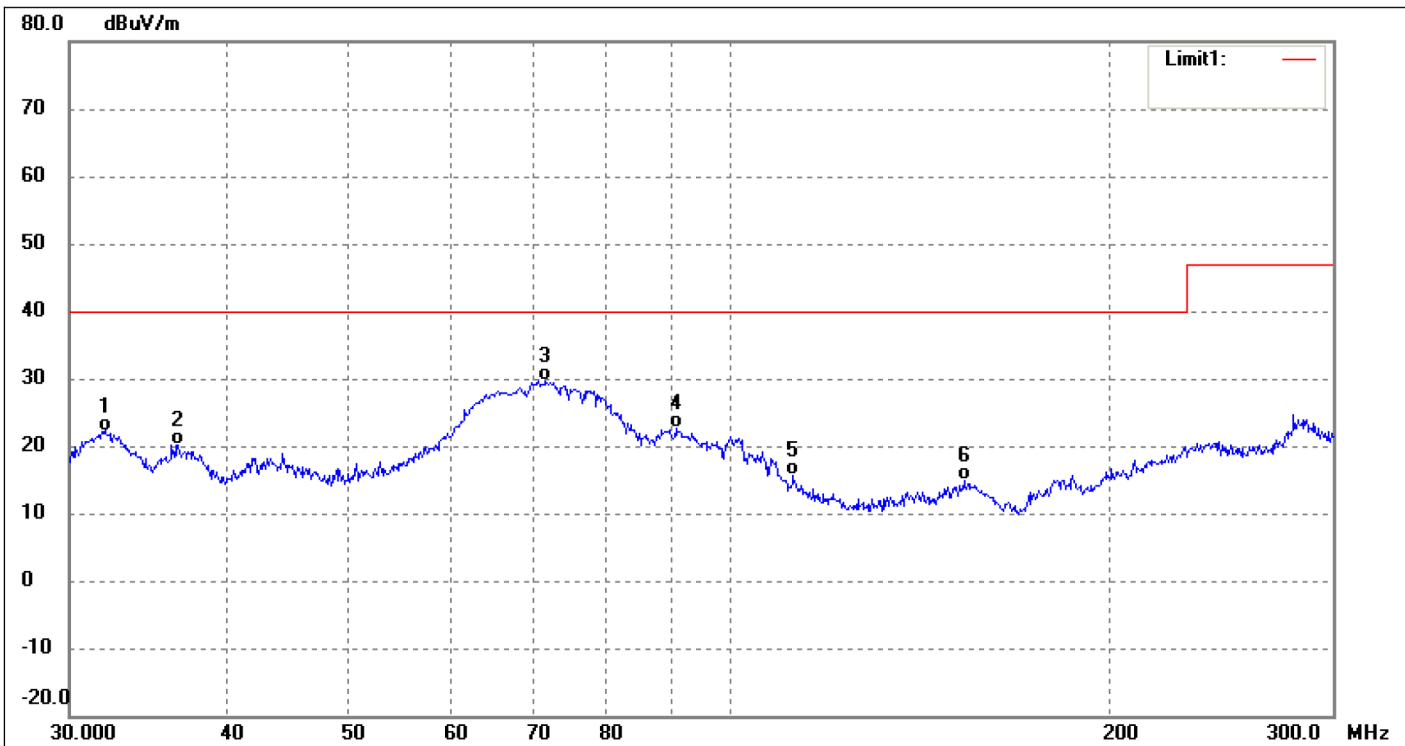


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over (dB)	Remark
1	31.9979	37.09	-14.84	22.25	40.00	-17.75	QP
2	36.5697	34.02	-13.84	20.18	40.00	-19.82	QP
3	71.4695	45.68	-16.15	29.53	40.00	-10.47	QP
4	90.5986	36.04	-13.52	22.52	40.00	-17.48	QP
5	112.2330	30.03	-14.30	15.73	40.00	-24.27	QP
6	153.1513	31.89	-17.05	14.84	40.00	-25.16	QP

Test Report No.: EFSH20051081-IE-01-E01

Eurofins Product Testing Service (Shanghai) Co., Ltd
No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China


Job No.:	RE	Polarization:	Vertical
Standard:	EN55015	Power Source:	AC 230V/50Hz
Test item:	Radiation Test	Date:	2019-4-1
Temp.(C)/Hum.(%RH):	25(C)/55%RH	Time:	15:55:23
Note:			

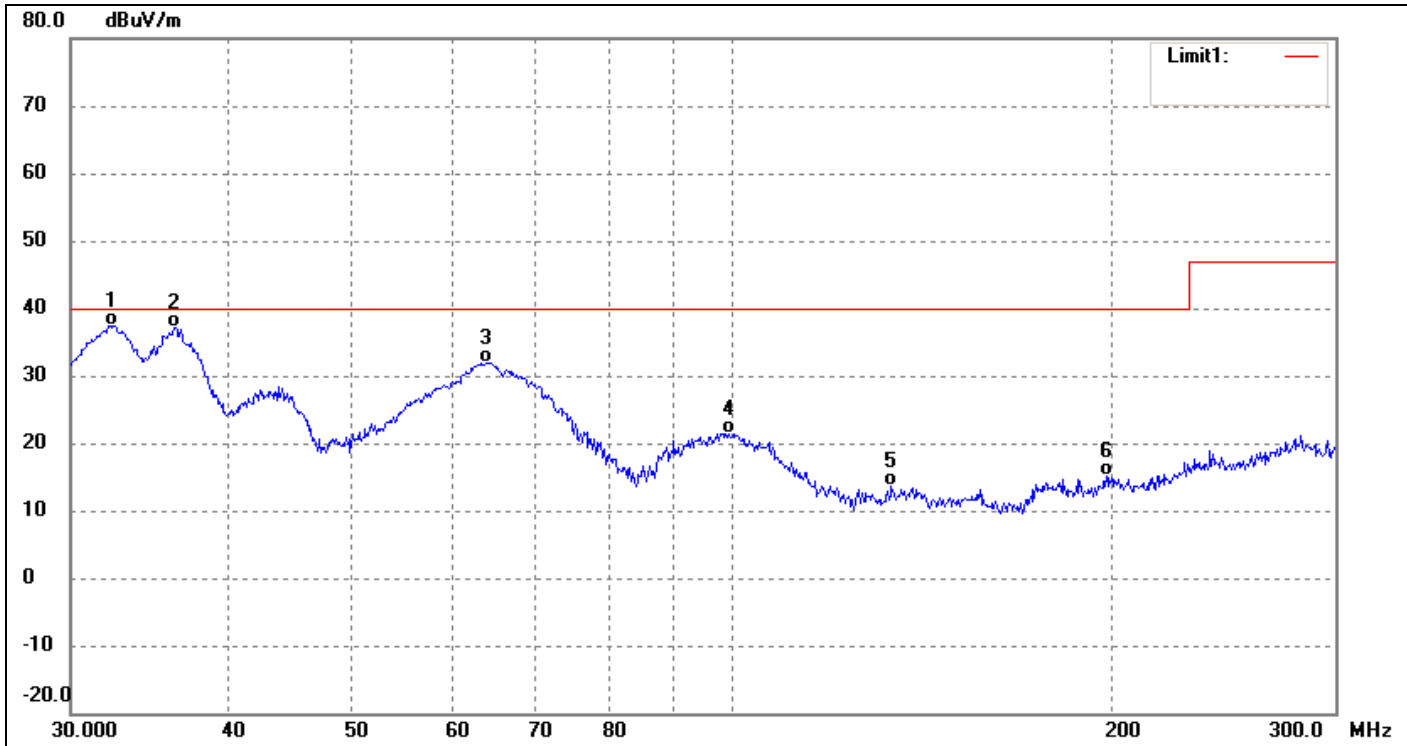

No.	Frequency (MHz)	Reading (dBuV)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Over (dB)	Remark
1	32.2940	52.30	-14.83	37.47	40.00	-2.53	QP
2	36.2344	51.22	-13.99	37.23	40.00	-2.77	QP
3	63.9913	45.85	-13.87	31.98	40.00	-8.02	QP
4	99.3392	35.28	-13.88	21.40	40.00	-18.60	QP
5	133.6967	30.87	-17.17	13.70	40.00	-26.30	QP
6	197.7521	28.62	-13.44	15.18	40.00	-24.82	QP

Model T8-20-65/C113/24

Job No.:	RE	Polarization:	Horizontal
Standard:	EN55015	Power Source:	AC 230V/50Hz
Test item:	Radiation Test	Date:	2019-4-1
Temp.(C)/Hum.(%RH):	25(C)/55%RH	Time:	15:48:46
Note:			

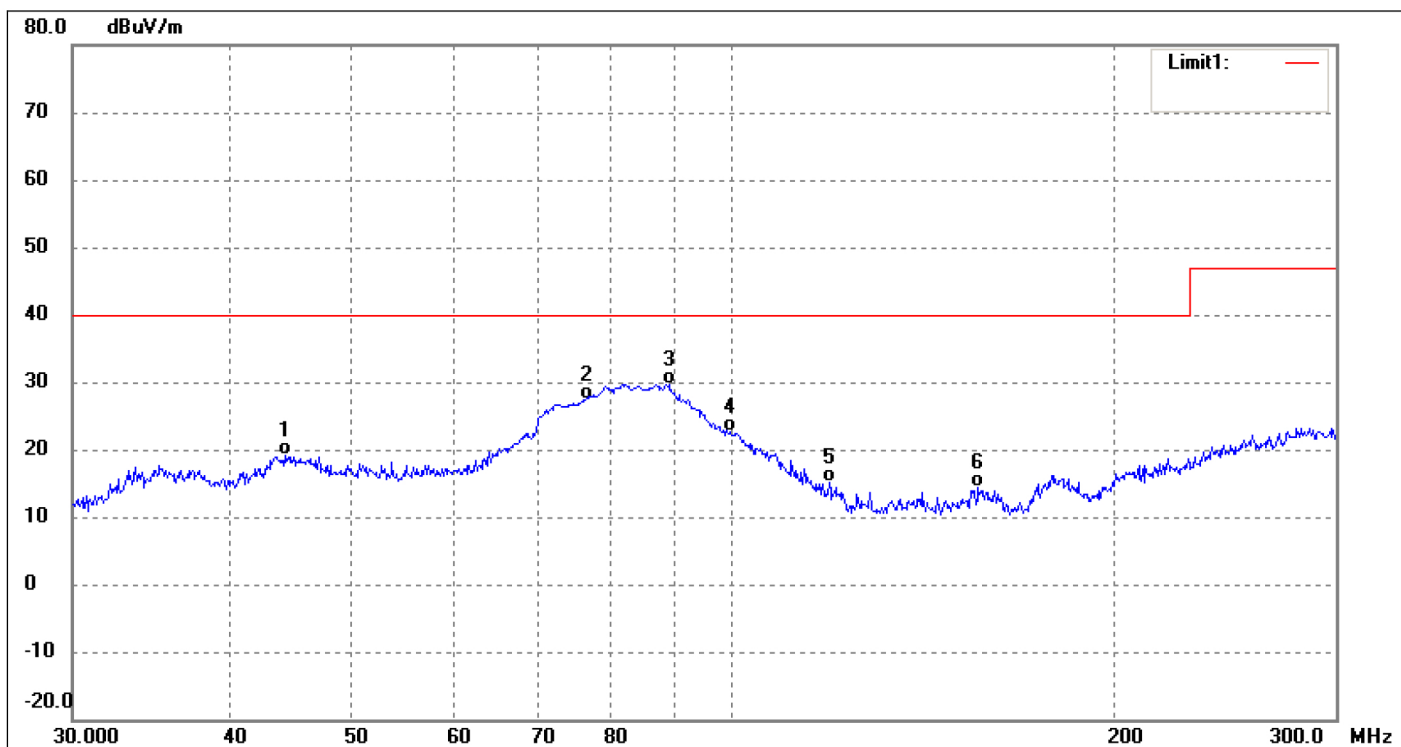


No.	Frequency (MHz)	Reading (dBuV)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Over (dB)	Remark
1	44.1693	31.14	-12.02	19.12	40.00	-20.88	QP
2	76.4049	44.49	-17.10	27.39	40.00	-12.61	QP
3	88.9448	43.89	-14.22	29.67	40.00	-10.33	QP
4	99.5681	36.38	-13.85	22.53	40.00	-17.47	QP
5	119.1573	30.53	-15.40	15.13	40.00	-24.87	QP
6	156.3582	31.14	-16.78	14.36	40.00	-25.64	QP

Test Report No.: EFSH20051081-IE-01-E01

 Eurofins Product Testing Service (Shanghai) Co., Ltd
 No. 395 West Jiangchang Road, Jing'an District, Shanghai, 200436, P.R. China

Job No.:	RE	Polarization:	Vertical
Standard:	EN55015	Power Source:	AC 230V/50Hz
Test item:	Radiation Test	Date:	2019-4-1
Temp.(C)/Hum.(%RH):	25(C)/55%RH	Time:	15:46:11
Note:			

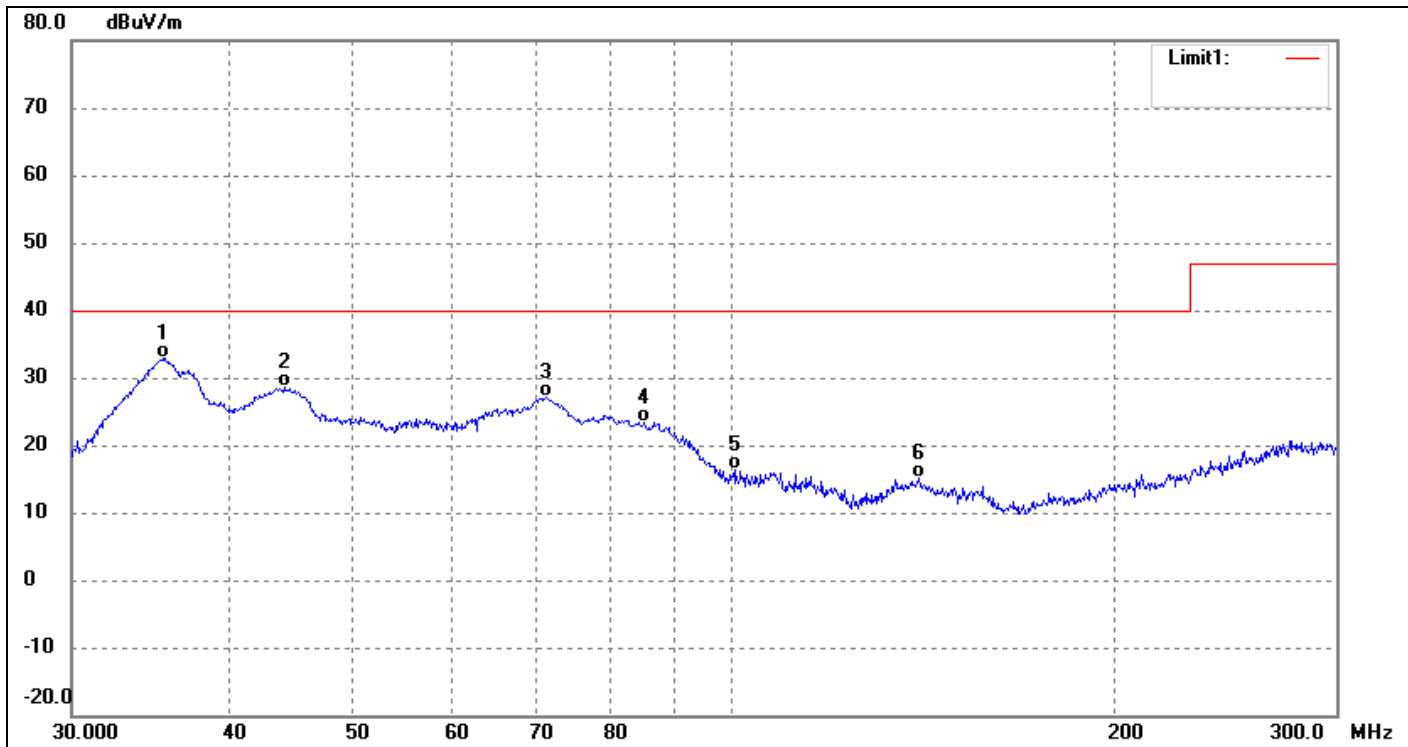

No.	Frequency (MHz)	Reading (dBuV)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Over (dB)	Remark
1	35.4096	47.09	-14.32	32.77	40.00	-7.23	QP
2	44.1693	40.73	-12.02	28.71	40.00	-11.29	QP
3	71.1412	43.14	-16.09	27.05	40.00	-12.95	QP
4	85.1376	40.55	-17.19	23.36	40.00	-16.64	QP
5	100.2583	30.13	-13.78	16.35	40.00	-23.65	QP
6	140.3204	32.28	-17.26	15.02	40.00	-24.98	QP

4.4 Voltage Changes, Voltage Fluctuations and Flicker


This part is concerned with the limitation of voltage fluctuations and flicker impressed on the public low-voltage system.

4.4.1 Limits

Value	Limit
Pst	1,0
Plt	0,65
dt	3,3%
dc	3,3%
dmax	4,0%

Note: Pst and Plt evaluations are required only for lighting equipment which is likely to produce flicker; for example: disco lighting and automatically regulated equipment.

4.4.2 Measurement test procedure

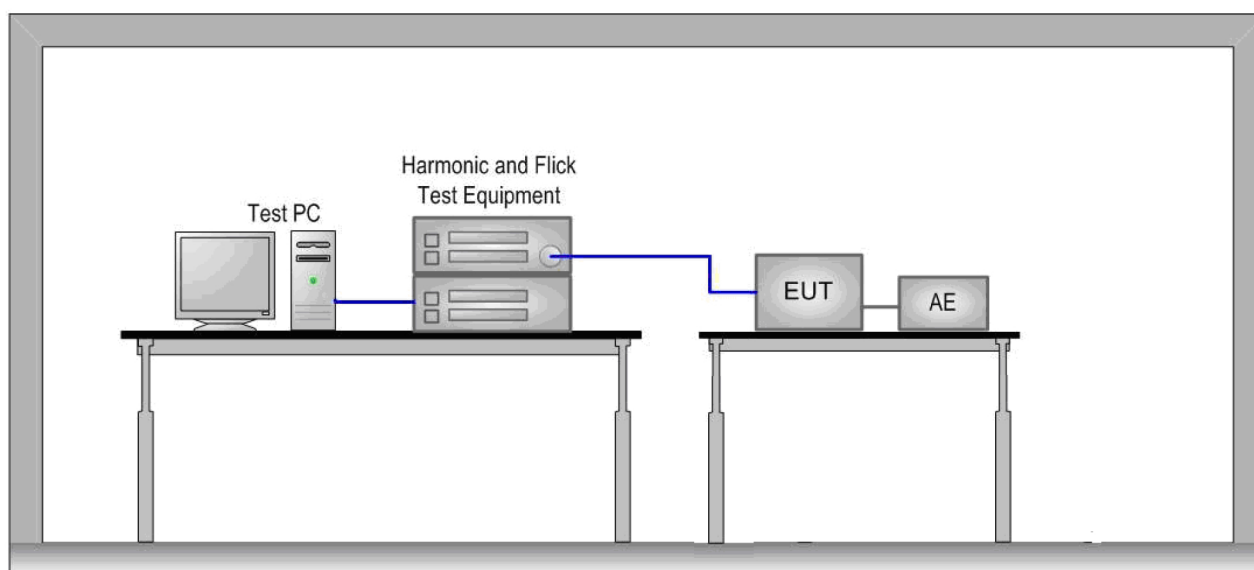

The equipment under test is placed on a wooden table with a height of 0,8 m in the EMC lab. The voltage changes, fluctuations and flicker were measured at the supply terminals of the EUT.

4.4.3 Results

Model T8-24-65/C113/25

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.93		
T-max (mS):	0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.00	Test limit (%):	4.00 Pass

Model T8-20-65/C113/24**Parameter values recorded during the test:****Vrms at the end of test (Volt): 231.48****T-max (mS): 0****Highest dc (%): 0.00****Highest dmax (%): 0.00****Test limit (mS): 500.0 Pass****Test limit (%): 3.30 Pass****Test limit (%): 4.00 Pass**

5 Immunity Test

5.1 Performance Criteria Description in Clause 4 of IEC 61547


Criterion A:	During the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.
Criterion B:	During the test, the luminous intensity may change to any value. After the test, the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.
Criterion C:	During and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and/or operating the regulating control. Additional requirement for lighting equipment incorporating a starting device: After the test, the lighting equipment is switched off. After half an hour, it is switched on again. The lighting equipment shall start and operate as intended.

5.2 Conditions during testing

The test shall be applied while the equipment is operated as intended under the normal operating conditions as laid down in the relevant product standard at stabilized luminous (radiant) flux and at normal laboratory conditions. Testing is only required at one combination of supply voltage and frequency, as specified by the manufacturer. Equipment including a regulating control shall be tested at a light output level of $50\% \pm 10\%$. The lamp load of the equipment under test shall be the maximum allowed. Luminaires and independent auxiliaries shall be tested with lamps for which they are intended. Where equipment can operate with lamps of different wattages, lamps of maximum wattage shall be applied. For independent auxiliaries, the length of the cables between device and lamp shall be 3 m unless the manufacturer prescribes another length.

5.3 ESD

5.3.1 Test Procedures

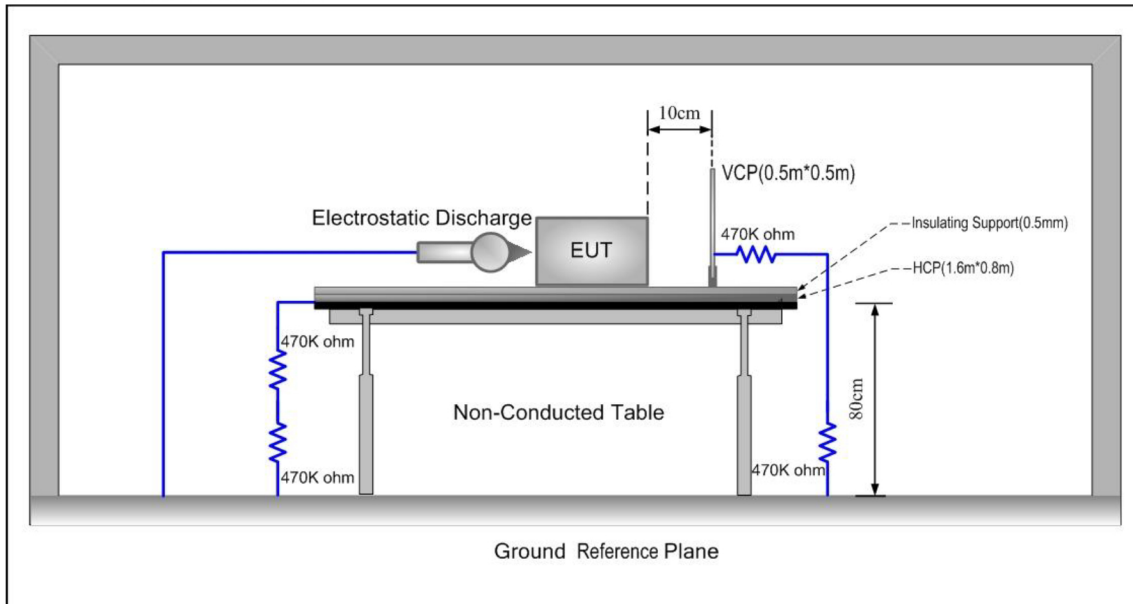

1. Contact discharge was applied only to conductive surfaces of the EUT. Air discharge was applied only to non-conducted surfaces of the EUT.
2. The EUT was put on a 0.8m high wooden table for table-top equipment or 0.1m high for floor standing equipment standing on the ground reference plane (GRP).
3. A horizontal coupling plane(HCP) 1.6m by 0.8m in size was placed on the table, and the EUT with its cables were isolated from the HCP by an insulating support thick than 0.5mm. The VCP 0.5m by 0.5m in size while HCP were constructed from the same material type and thickness as that of the GRP, and connected to the GRP via a 470kΩ resistor at each end. The distance between EUT and any of the other metallic surfaces excepted the GRP, HCP and VCP was greater than 1m.
4. During the contact discharges, the tip of the discharge electrode was touching the EUT before the discharge switch is operated. During the air discharges, the round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the ESD generator was removed from the EUT, the generator is then retriggered for a new single discharge. For ungrounded product, a discharge cable with two resistances was used after each discharge to remove remnant electrostatic voltage. 10 times of each polarity single discharge were applied to HCP and VCP.

5.3.2 Results


Model T8-24-65/C113/25 and T8-20-65/C113/24

Test point	Table (T) Floor (F)	Contact (C) Air (A)	Voltage (kV)	Number of discharge	Polarity (+ / -)	Opinion
Air discharge	T	A	±2, ±4, ±8	Mini 20/point	+ / -	A
Contact discharge	T	C	±2, ±4	Mini 20/point	+ / -	A
HCP	T	C	±2, ±4	Mini 20/point	+ / -	A
VCP	T	C	±2, ±4	Mini 20/point	+ / -	A

A: no loss of function.

5.4 Radio frequency electromagnetic fields

5.4.1 Measurement procedure

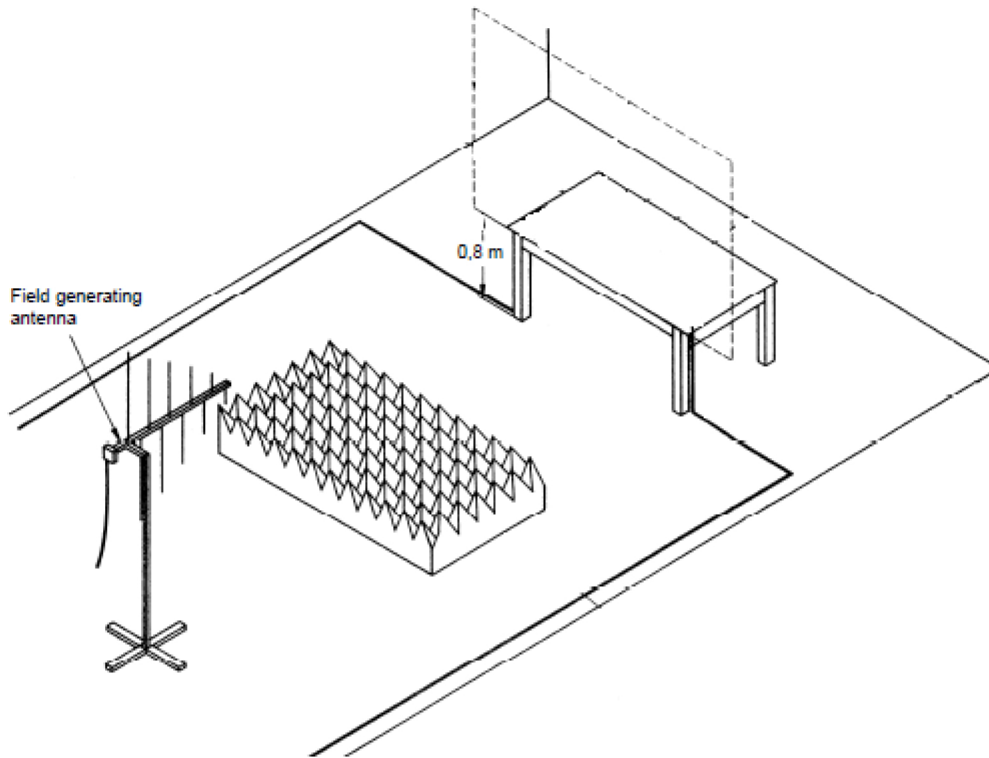

1. The EUT was placed on 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP. The tests normally shall be performed with the generating antenna facing each of four sides of the EUT. When equipment can be used in different orientations (e.g. vertical or horizontal) the test shall be performed on all possible sides of the EUT.
2. The tests are carried out with a field strength by 3 V/m (measured in the unmodulated field) with amplitude modulated signal by a depth of 80 % by a sinusoidal audio signal of 1 kHz. The logarithmic step was 1% and the dwell time was 3s dependent of the EUT cycle time. Test was performed on subcontractor.

5.4.2 Results


Model T8-24-65/C113/25 and T8-20-65/C113/24

Frequency Range	Field Strength	Modulation	Antenna Polarity	Opinion
80MHz-1GHz	3V/m	80% AM 1kHz	Horizontal	A
80MHz-1GHz	3V/m	80% AM 1kHz	Vertical	A

A: no loss of function.

5.5 Electrical Fast Transients

5.5.1 Measurement procedure

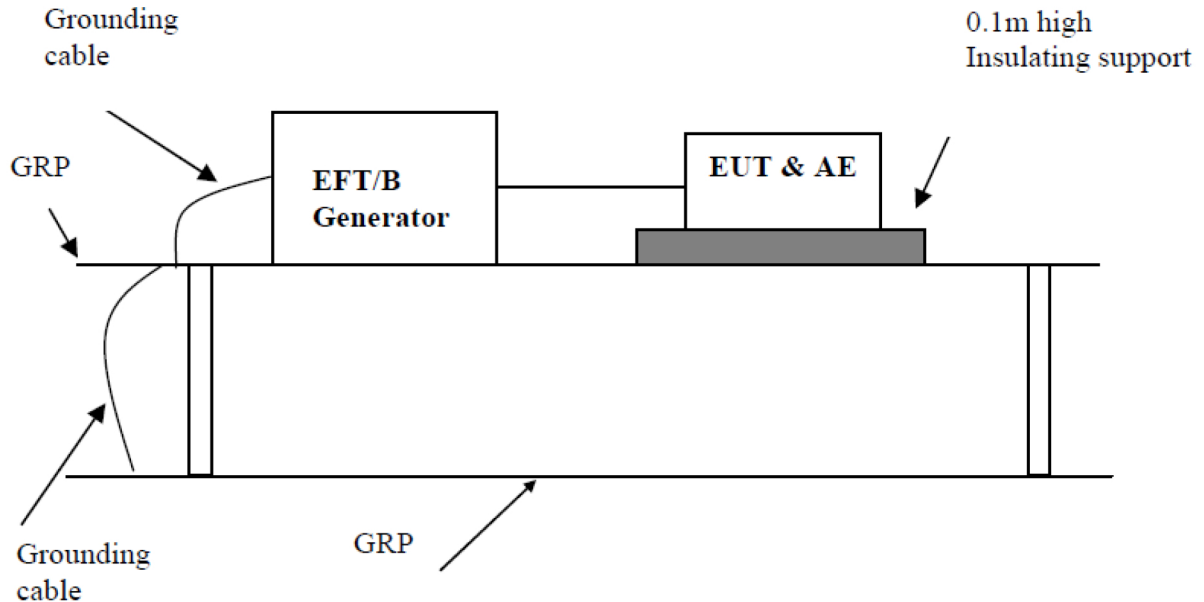

1. The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP.
2. The GRP shall project beyond the EUT and the clamp by at least 0.1m on all sides. The distance between the EUT and any other of the metallic surface except the GRP was greater than 0.5m. All cables to the EUT were placed on the insulating support 0.1m above GRP. Cables not subject to EFT were routed as far as possible from cable under test to minimize the coupling between the cables.
3. The length of signal and power cable between the EUT and EFT generator was 0.5m. If the cable is a non-detachable supply cable more than 0.5m, the excess length of this cable shall be folded to avoid a flat coil and situated at a distance of 0.1m above the GRP.

5.5.2 Results


Model T8-24-65/C113/25 and T8-20-65/C113/24

Test port	Voltage (kV)	Polarity (+ / -)	Duration (s or min)	Waveform Tr / Th	Repetition Frequency (kHz)	Opinion
a.c. port, L	1	+/-	2 min	5/50 ns	5	A
a.c. port, N	1	+/-	2 min	5/50 ns	5	A
a.c. port, L+N	1	+/-	2 min	5/50 ns	5	A

A: no loss of function.

5.6 Injected currents(RF continues conducted)

5.6.1 Measurement procedure

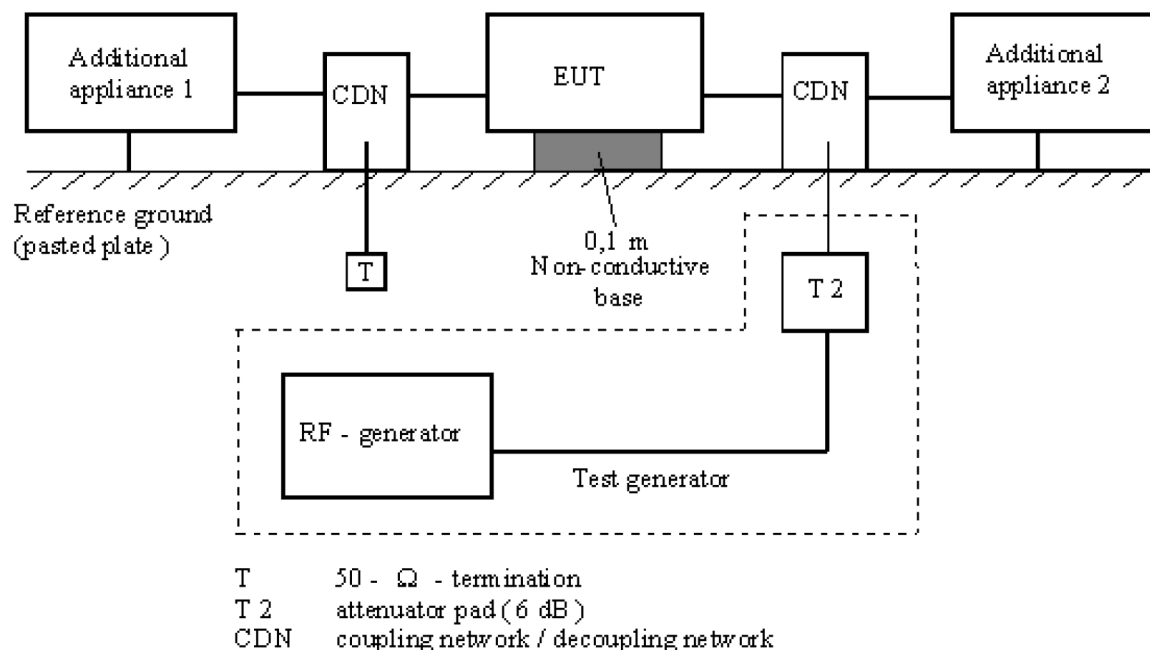

1. The EUT was placed on an insulating support of 0.1m height above a ground reference Plane, arranged and connected to satisfy its functional requirement. All cables exiting the EUT was supported at a height of at least 30 mm above the ground reference plane.
2. The coupling and decoupling devices were required, they were located between 0,1 m and 0,3 m from the EUT. This distance was to be measured horizontally from the projection of the EUT on to the ground reference plane to the coupling and decoupling device.
3. The frequency range was swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80 % amplitude modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or to change coupling devices as necessary. Where the frequency was swept incrementally, the step size does not exceed 1 % of the preceding frequency value. The dwell time of the amplitude modulated carrier at each frequency was not less than the time necessary for the EUT to be exercised and to respond, and was not less than 3 s.

5.6.2 Results


Model T8-24-65/C113/25 and T8-20-65/C113/24

Test port	Voltage (e.m.f.)	Modulation	Frequency Range	Opinion
AC power line	3V	80% AM 1 kHz	150 kHz - 80 MHz	A

A: no loss of function.

5.7 Surge Immunity

5.7.1 Measurement procedure

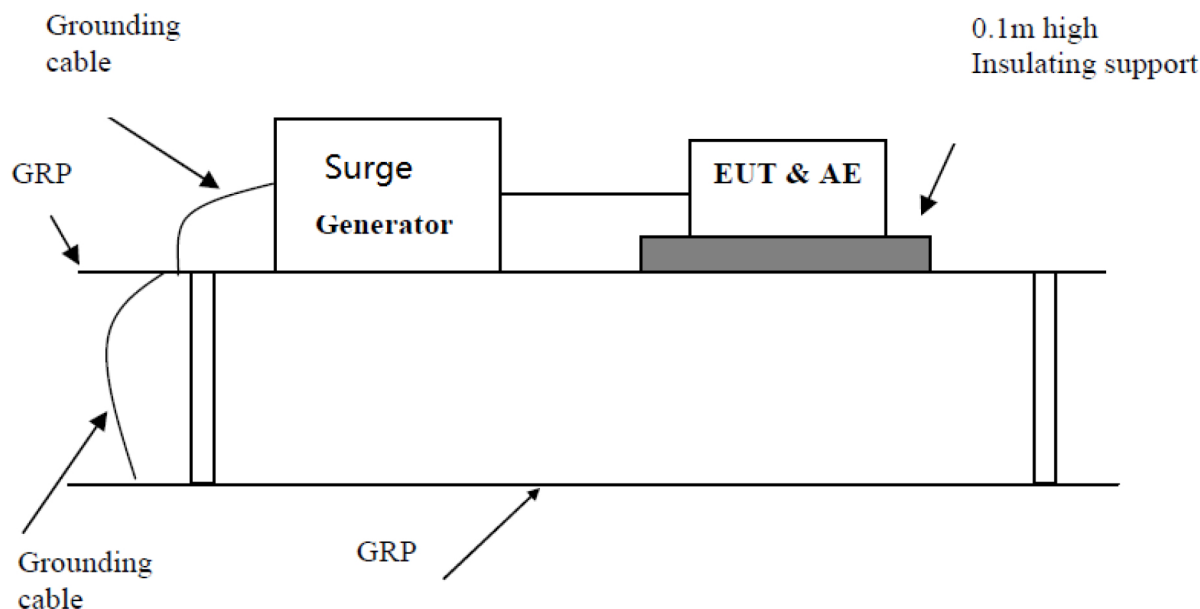

1. The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0.1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP.
2. The 1,2/50 μ s surge was to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks were required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines and to provide sufficient decoupling impedance to the surge wave so that the specified wave may be applied on the lines under test.
3. Pulses shall be applied to the a.c. voltage wave as follows; five positive polarity pulses at the 90° phase angle, five negative polarity pulses at the 270° phase angle.

5.7.2 Results

Model T8-24-65/C113/25 and T8-20-65/C113/24


Test port	Polarity (+ / -)	Voltage (kV)	Voltage Waveform	Current Waveform	Repetition Rate	Number of pulses	Opinion
a.c. port, L-N	+/-	0.5	1.2/50 μ s	8/20 μ s	1 per min	5 /point	B

A: no loss of function.

B: the appliance would not work normally during the test, but after test it would recover.

5.8 Voltage dips and Interruption

5.8.1 Measurement procedure

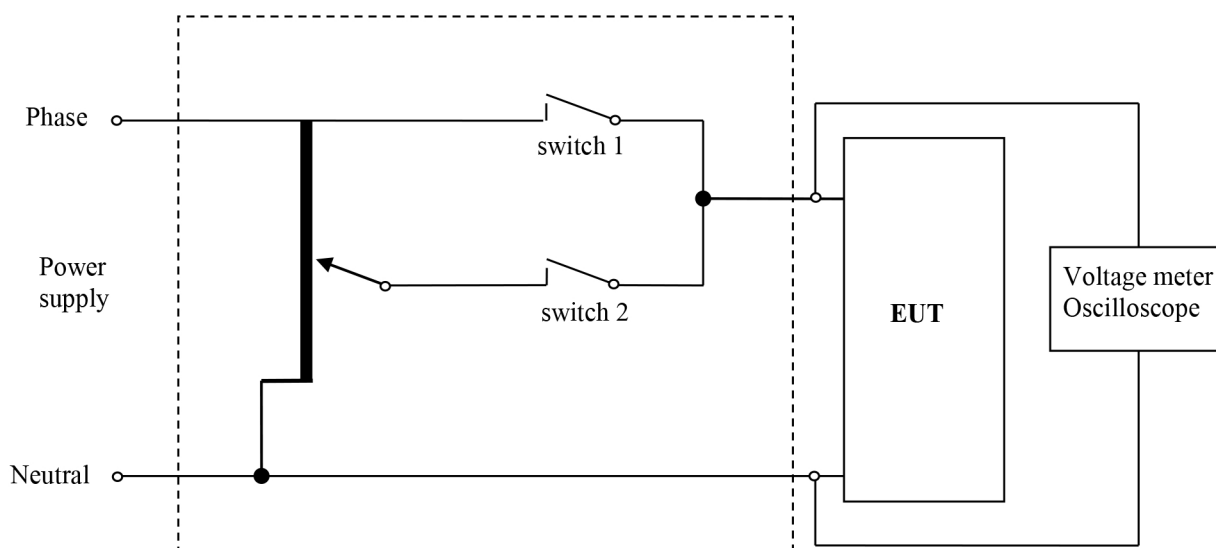

1. The EUT was placed on a ground reference plane (GRP) insulated by an insulating support 0,1 m thick and the GRP was placed on a 0.8m high wooden table for table-top equipment. For floor standing equipment, the EUT was placed on a 0.1m high wooden support above the GRP.
2. The test was performed with the EUT connected to the test generator with the shortest power supply cable as specified by the EUT manufacturer. Changes to the voltage level shall occur at a zero crossing point in the a.c. voltage waveform.
3. The EUT was tested for each selected combination of test level and duration with a sequence of three dips /interruptions with intervals of 10 s minimum. Each representative mode of operation was tested.

5.8.2 Results

Model T8-24-65/C113/25 and T8-20-65/C113/24

Reduction of supply voltage	Test level in % U_T	Duration in parts of period (in ms)	Opinion
100%	0	0,5 (10 ms)	B
30 %	70	10 (200 ms)	B

A: no loss of function.

B: the appliance would not work normally during the test, but after test it would recover.

6 Test setup Photos

Radiated Disturbance Test Setup



Conducted Emission Test Setup



Radiated Electromagnetic Disturbances Test Setup



Current Harmonics /Voltage Flicker Test Setup



Electrostatic Discharge Test Setup




Radio Frequency Electromagnetic Fields Test Setup



**Electrical Fast Transients Immunity/ Surge Immunity/ Voltage DIPS
and Interruption Test Setup**




Injected Currents (RF common mode) Test Setup

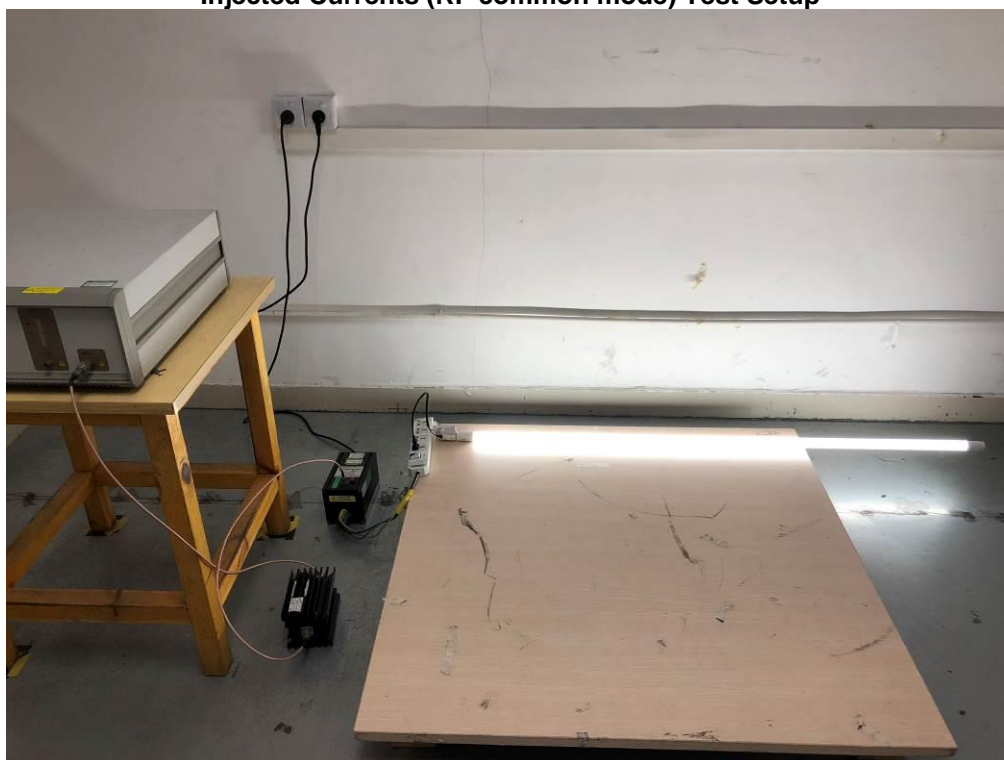

7 EUT Photos

Photo1: Overview of 600mm, 900mm, 1200mm and 1500mm series

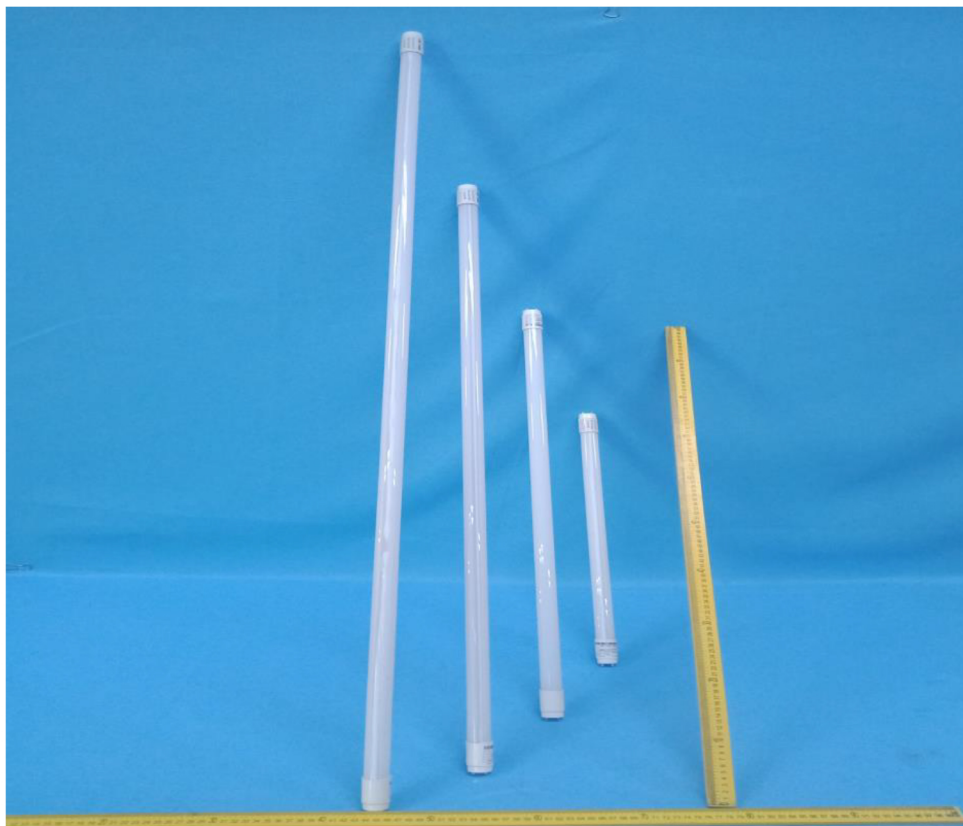

For model T8-20-65/C113/24
Photo 2: Exteral view

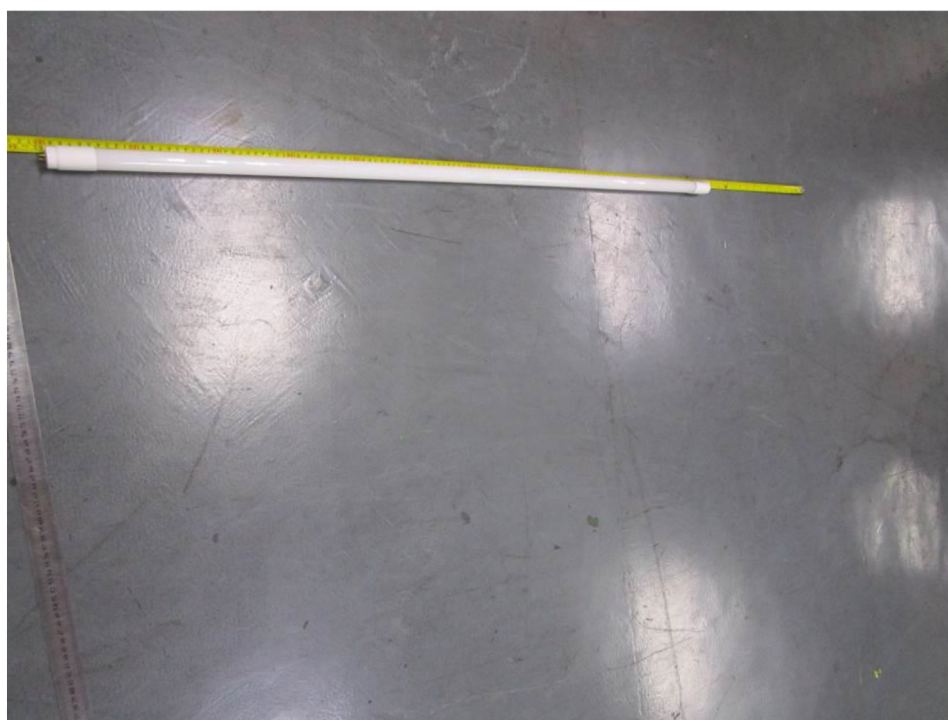


Photo 3: PCB view

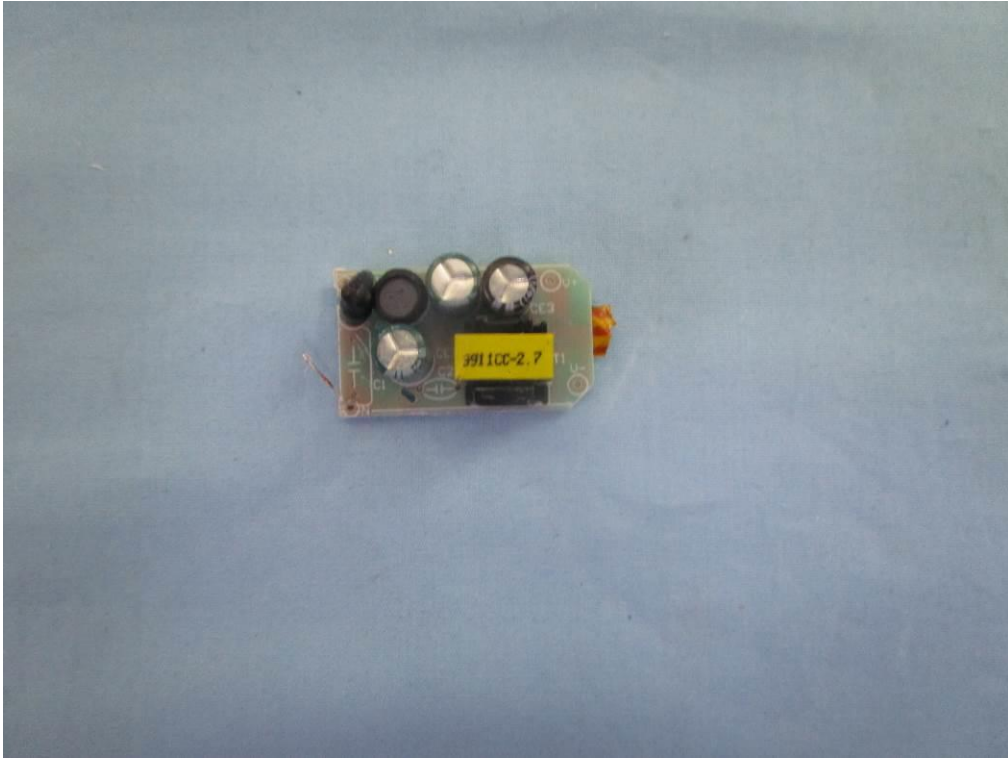


Photo 4: PCB view


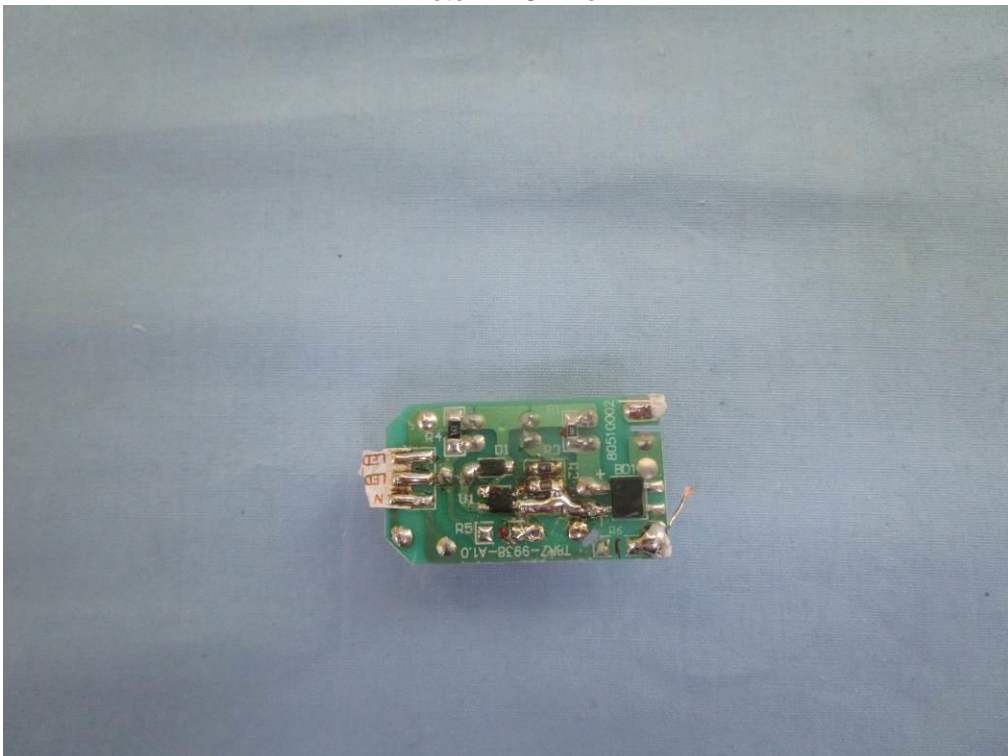


Photo 5: LED view

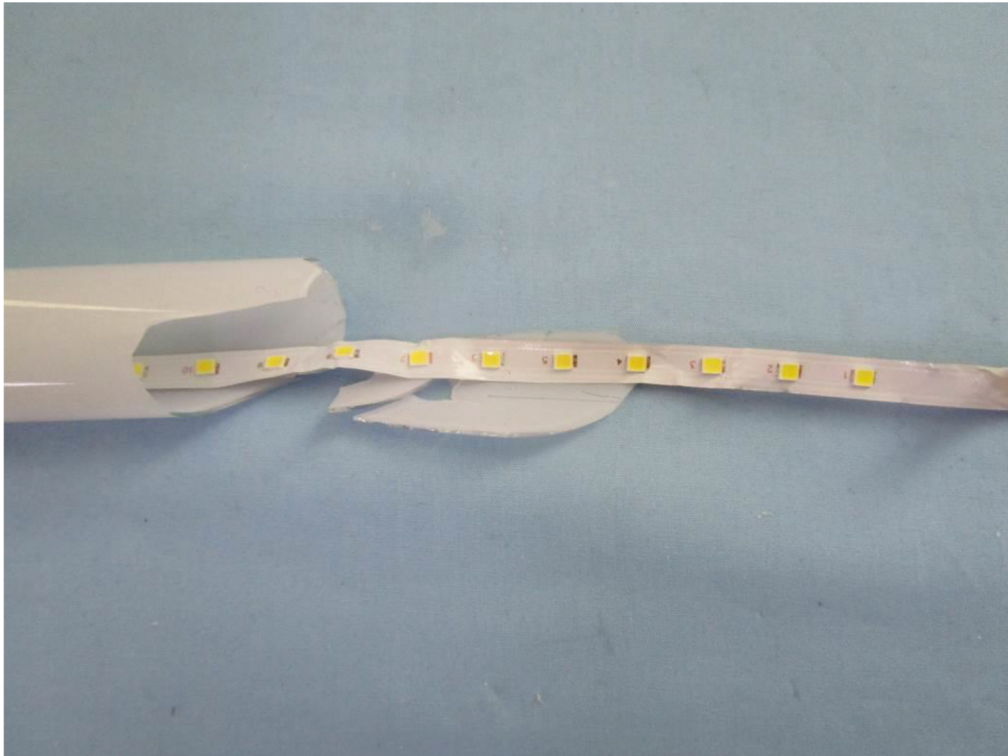

For model T8-24-65/C113/25
Photo 6: External view



Photo 7: PCB view

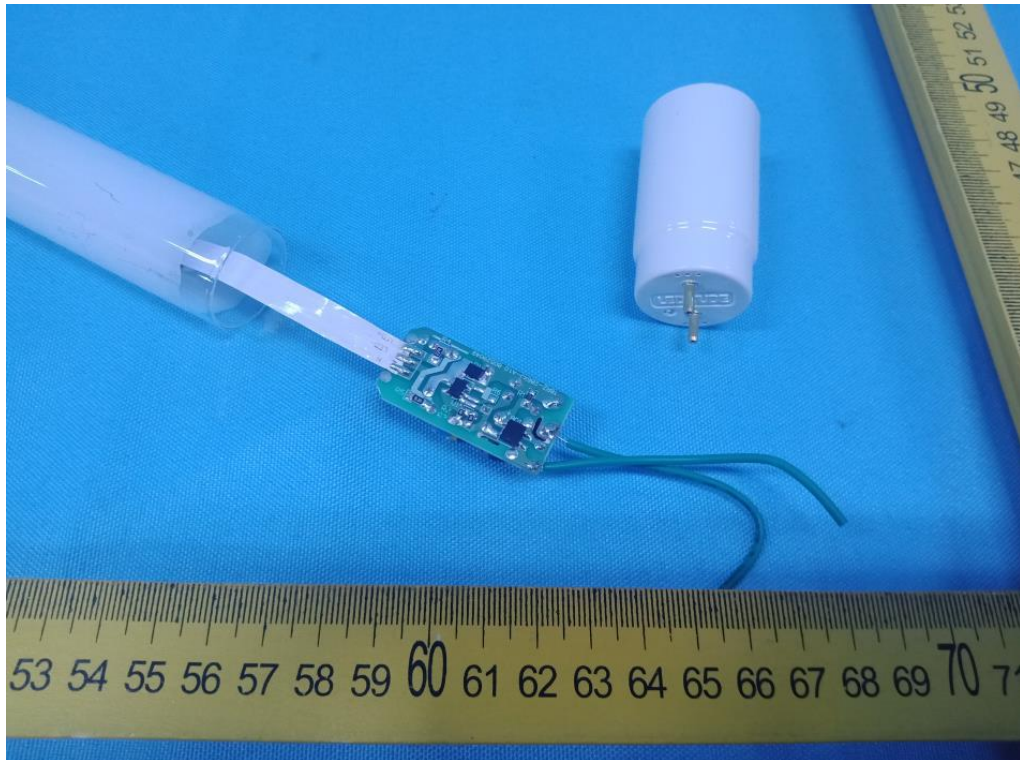


Photo 8: PCB view

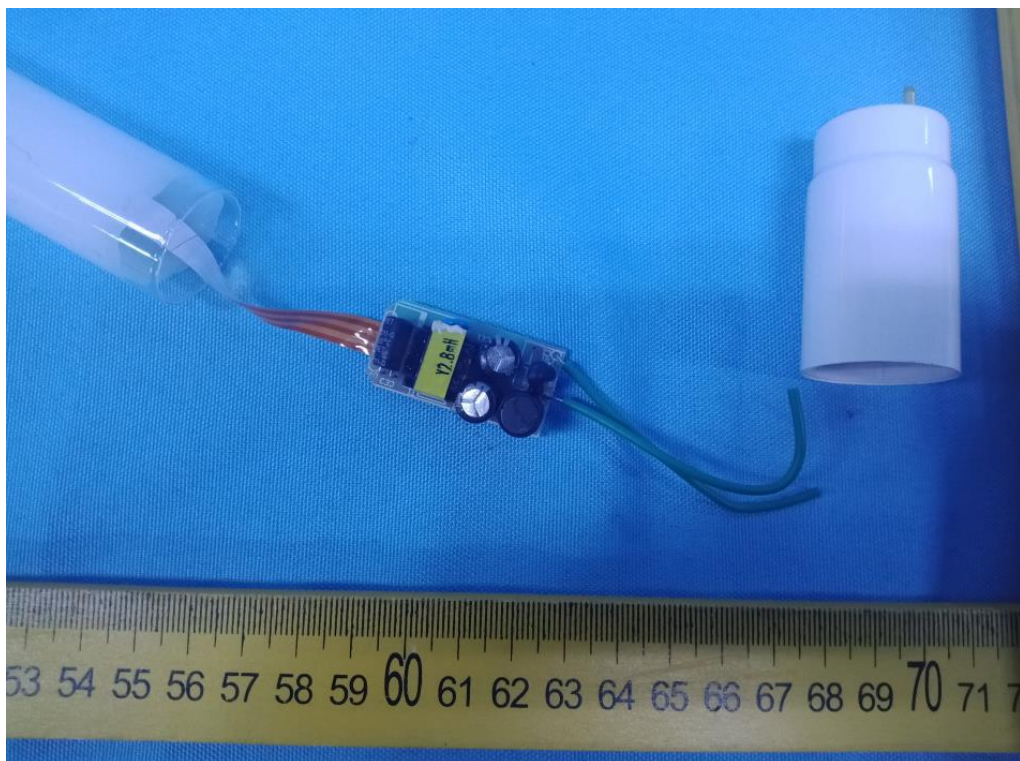


Photo 9: LED view

