


NLED583*

High power multiple down lights



CRI
90

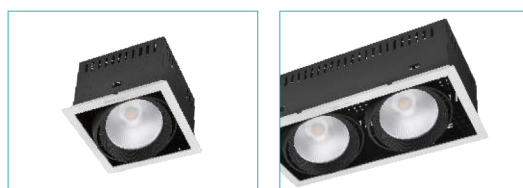

APPLICATIONS

- Shopping malls
- Showrooms
- Fashion shops
- Lobbies

TECHNICAL DETAILS


- COB LEDs
- Rated life: 30,000 hours

CONSTRUCTION


- Die-cast aluminium bezel
- Anodized aluminium reflector
- Steel housing
- Semi-white powder coated finish
- Adjustable angle 40°
- 1-head, 2-head and 3-head designs
- Separate driver for each head included

OPTIONS


- Beam angle: Choice of 15°, or 24°

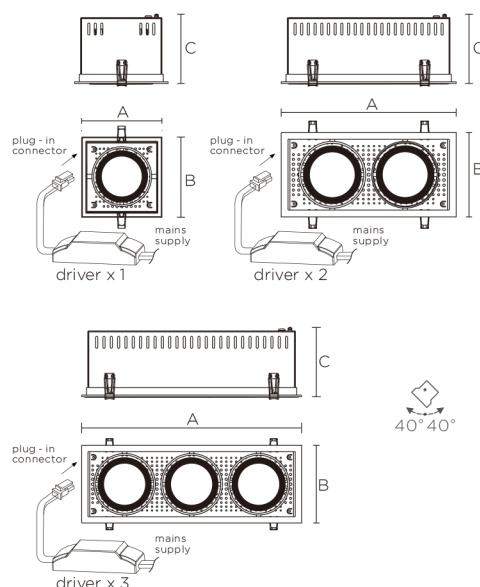

| Watts | A | B | C | Cut-out |
|-------------|-----|-----|-----|---------|
| 24W/35W | 173 | 173 | 128 | 160x160 |
| 2x24W/2x35W | 358 | 173 | 128 | 345x160 |
| 3x24W/3x35W | 489 | 173 | 128 | 475x160 |



NLED5831 24W 15°



NLED5832A 70W 24°

| Model | Colour temp. | Lumens | CRI | PF | Beam angle |
|-----------------|-------------------------|----------|-----|------|------------|
| NLED5831 24W | 3000K/3500K/4000K/5700K | 2,100 lm | >90 | >0.9 | 15°/24° |
| NLED5832 2x24W | 3000K/3500K/4000K/5700K | 3,500 lm | >90 | >0.9 | 15°/24° |
| NLED5833 3x24W | 3000K/3500K/4000K/5700K | 5,000 lm | >90 | >0.9 | 15°/24° |
| NLED5831A 35W | 3000K/3500K/4000K/5700K | 2,600 lm | >90 | >0.9 | 15°/24° |
| NLED5832A 2x35W | 3000K/3500K/4000K/5700K | 5,100 lm | >90 | >0.9 | 15°/24° |
| NLED5833A 3x35W | 3000K/3500K/4000K/5700K | 7,600 lm | >90 | >0.9 | 15°/24° |