
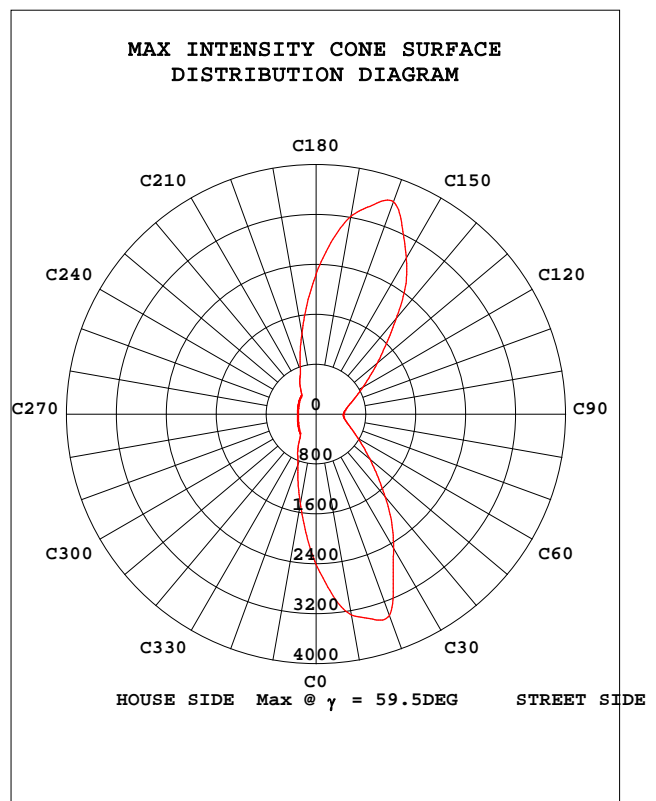


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.11 lm/W			
MODEL		I _{max} (cd)	3628	η street_up(%)	0.0
NOMINAL POWER(W)	50	LOR(%)	100.0	η street_down(%)	66.9
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	6343	η house_up(%)	0.0
NOMINAL FLUX(lm)	6342.94	MAXIMUM @(C,γ)	160,59.5	η house_down(%)	33.1
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	
TEST VOLTAGE(V)	231.1	η down(%)	100.0	SLI	

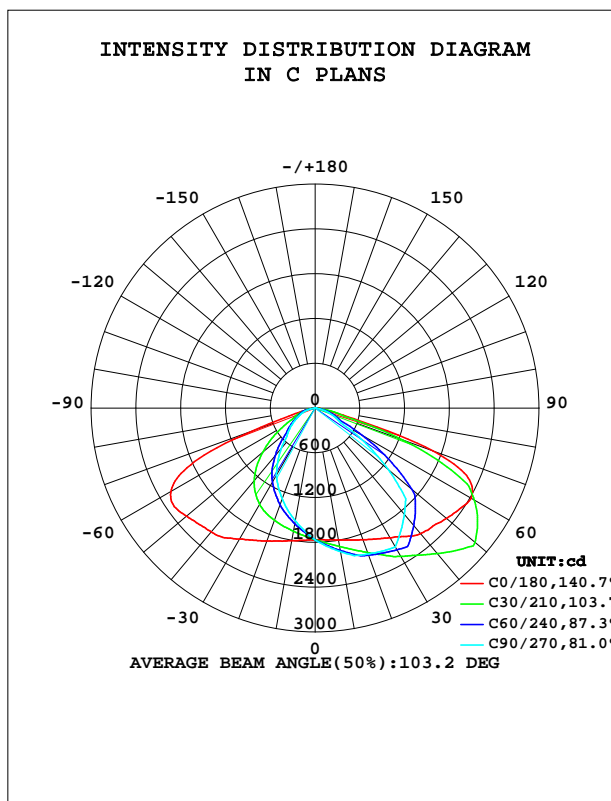

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-06-07


γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
 Humidity:65.0%
 Test Distance:9.500m [K=1.0000]
 Remarks:

Note: SLI:Specific Luminaire Index

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

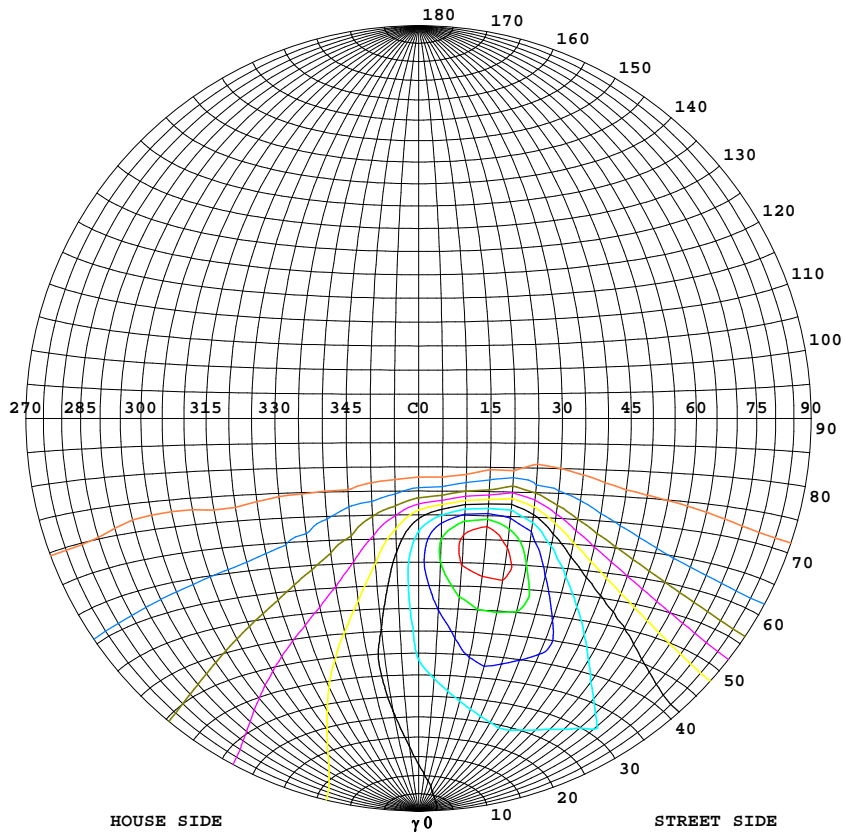

Classification:

IES:Type II - Short
CIE:Narrow - Short
IES:Cut-off
CIE:Semi-cut-off
Max.At80:42.28cd/klm
Max.At90:6.191cd/klm
Max.80-90:42.28cd/klm



ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	3628
90%	3265
80%	2903
70%	2540
60%	2177
50%	1814
40%	1451
30%	1088
20%	726
10%	363
5%	181

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

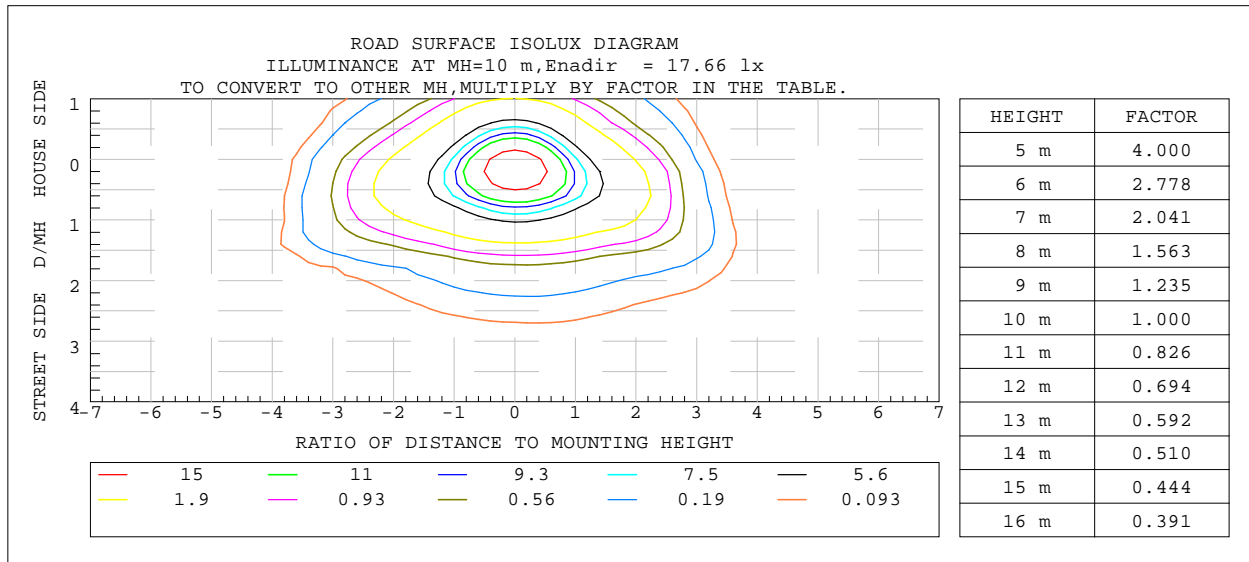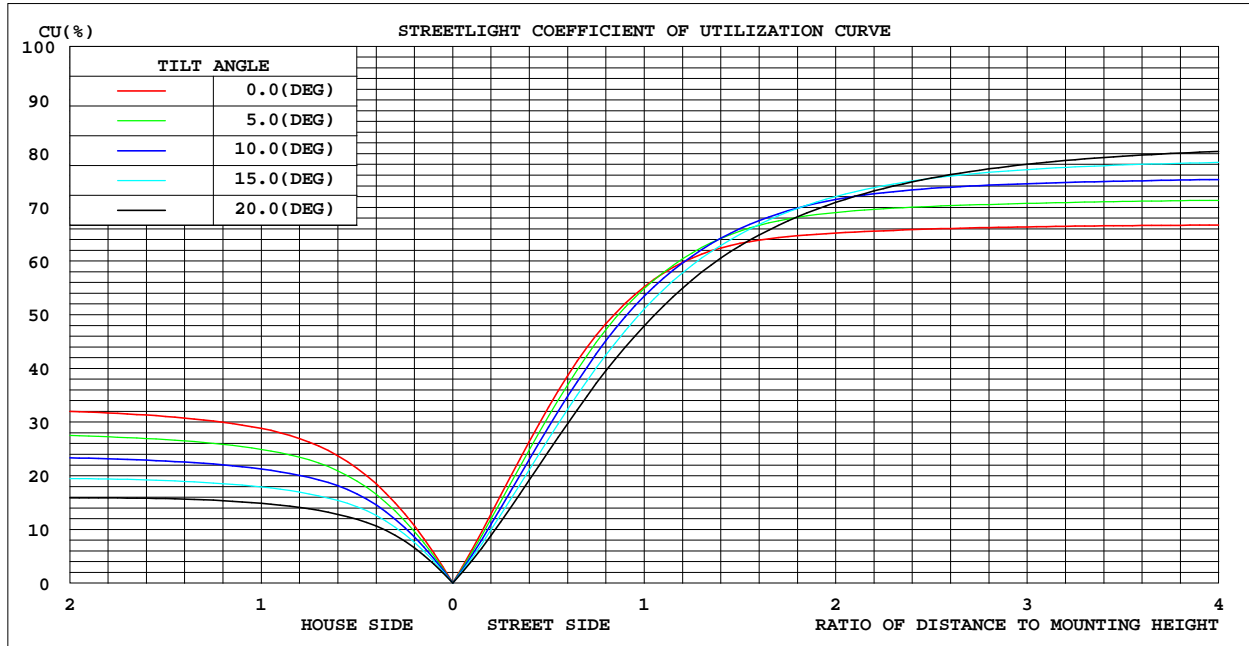

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	\$lum,lamp
5	1773	1835	1859	1839	1778	1690	1650	1686	0- 5	42.15	42.15	0.66,0.66
10	1796	1913	1952	1921	1802	1619	1535	1613	5- 10	126.3	168.5	2.66,2.66
15	1832	2004	2046	2018	1845	1550	1419	1545	10- 15	210.5	379.0	5.98,5.98
20	1878	2106	2080	2130	1896	1476	1294	1474	15- 20	294.2	673.2	10.6,10.6
25	1934	2175	2115	2213	1954	1388	1168	1393	20- 25	375.5	1049	16.5,16.5
30	2007	2242	2150	2304	2027	1283	1043	1300	25- 30	454.2	1503	23.7,23.7
35	2101	2319	2005	2411	2122	1159	875.0	1194	30- 35	527.0	2030	32,32
40	2198	2373	1861	2508	2166	1014	707.2	1064	35- 40	585.0	2615	41.2,41.2
45	2236	2247	1716	2410	2201	834.5	539.4	881.9	40- 45	624.1	3239	51.1,51.1
50	2300	2082	1276	2274	2253	642.5	457.5	682.3	45- 50	640.8	3880	61.2,61.2
55	2360	1861	836.2	2081	2302	443.0	375.6	472.1	50- 55	629.4	4509	71.1,71.1
60	2414	1335	396.1	1533	2230	357.2	293.7	375.4	55- 60	588.9	5098	80.4,80.4
65	2281	752.0	302.8	915.0	1892	275.5	234.6	281.5	60- 65	516.7	5615	88.5,88.5
70	1675	347.1	209.5	466.9	889.7	208.7	175.4	207.0	65- 70	402.2	6017	94.9,94.9
75	465.3	217.8	116.2	289.3	210.8	155.0	116.3	153.1	70- 75	219.7	6237	98.3,98.3
80	108.8	79.24	0	95.34	67.05	85.70	0	83.81	75- 80	83.06	6320	99.6,99.6
85	55.84	0	0	0	31.24	0	0	0	80- 85	20.04	6340	100,100
90	39.27	0	0	0	27.70	0	0	0	85- 90	3.119	6343	100,100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

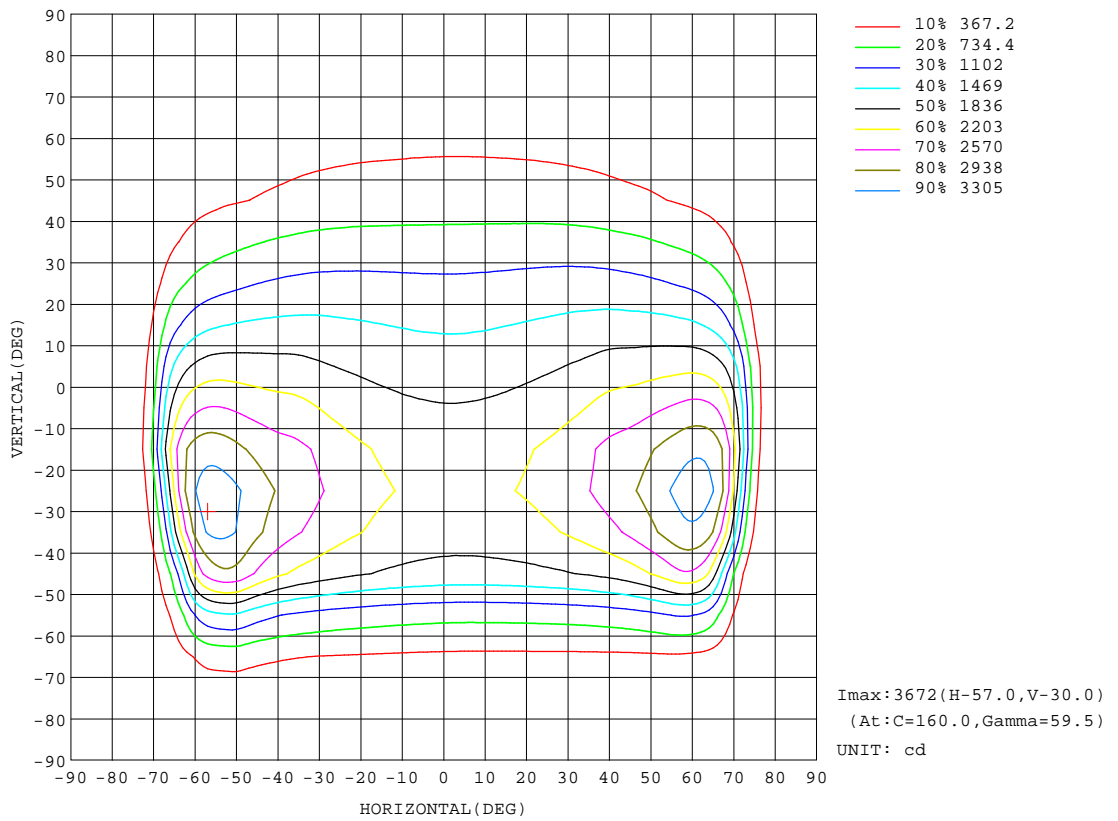


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Planar Illuminance Curve

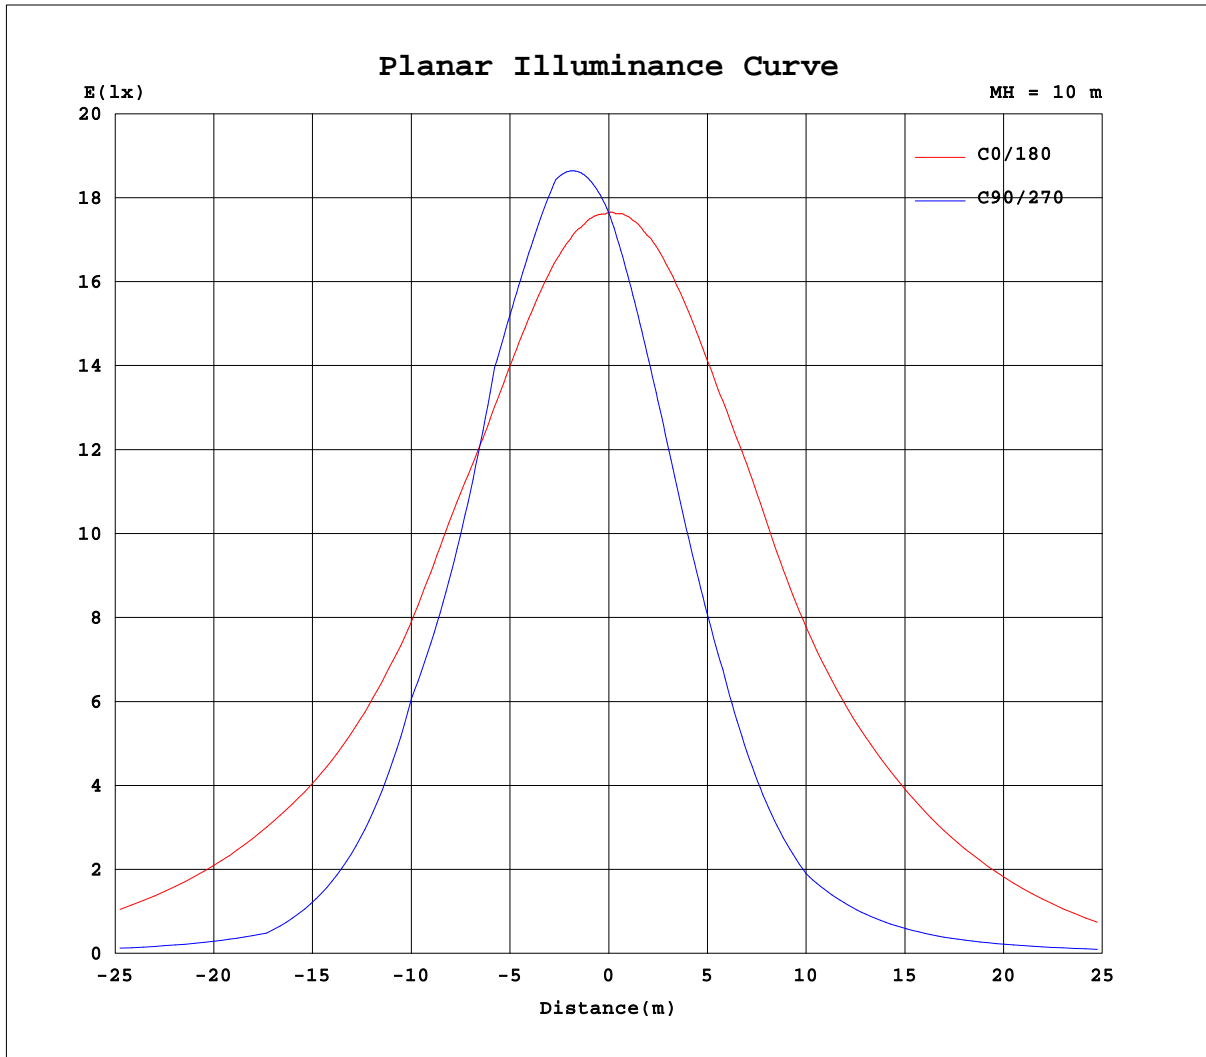

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
5	1773	1781	1789	1797	1804	1811	1818	1824	1830	1835	1839	1843	1847	1849	1852	1854	1856	1858	1859
10	1796	1812	1828	1843	1858	1871	1883	1893	1904	1913	1923	1930	1936	1941	1944	1946	1948	1950	1952
15	1832	1857	1882	1905	1926	1945	1961	1977	1992	2004	2014	2022	2029	2035	2039	2042	2041	2044	2046
20	1878	1915	1950	1982	2011	2037	2058	2078	2092	2106	2105	2102	2096	2092	2088	2084	2081	2078	2080
25	1934	1986	2034	2078	2115	2147	2173	2194	2186	2175	2164	2155	2142	2136	2127	2122	2118	2113	2115
30	2007	2078	2142	2198	2244	2285	2294	2278	2262	2242	2225	2210	2193	2179	2170	2159	2151	2148	2150
35	2101	2200	2288	2363	2422	2432	2406	2376	2347	2319	2293	2266	2198	2134	2084	2046	2019	2005	2005
40	2198	2331	2456	2562	2622	2590	2544	2497	2450	2373	2245	2141	2055	1989	1937	1898	1872	1859	1861
45	2236	2414	2576	2719	2745	2733	2692	2632	2422	2247	2102	1990	1901	1835	1784	1747	1722	1712	1716
50	2300	2548	2773	2901	2917	2899	2794	2514	2275	2082	1935	1820	1686	1546	1440	1362	1308	1279	1276
55	2360	2715	3030	3146	3170	3061	2657	2329	2072	1861	1597	1384	1217	1087	989	916	867	840	836
60	2414	2895	3281	3419	3421	2912	2462	2091	1665	1335	1079	883	730	615	528	466	423	400	396
65	2281	2888	3311	3571	3155	2678	2076	1483	1058	752	524	380	355	338	324	312	305	301	303
70	1675	2159	2594	2678	2468	1930	1254	721	402	347	310	282	262	246	233	221	213	209	210
75	465	507	725	823	1046	702	383	321	258	218	195	179	166	155	142	129	122	117	116
80	109	104	110	155	160	213	182	137	100	79.2	66.2	53.2	38.8	26.2	15.8	8.32	3.56	0.87	0.00
85	55.8	58.4	61.7	64.1	55.0	24.6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	39.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
5	1859	1859	1858	1855	1852	1850	1846	1843	1839	1834	1829	1823	1817	1810	1802	1794	1786	1778	1768
10	1953	1952	1950	1948	1945	1944	1937	1930	1921	1913	1904	1893	1881	1867	1852	1836	1820	1802	1781
15	2047	2047	2044	2049	2042	2037	2033	2027	2018	2007	1995	1981	1964	1944	1922	1898	1872	1845	1811
20	2084	2086	2094	2098	2105	2115	2121	2129	2130	2118	2104	2084	2062	2036	2006	1972	1935	1896	1847
25	2119	2125	2135	2144	2159	2171	2189	2202	2213	2227	2232	2211	2187	2153	2110	2064	2011	1954	1885
30	2155	2159	2178	2196	2213	2239	2262	2285	2304	2326	2342	2358	2344	2300	2247	2183	2109	2027	1932
35	2015	2038	2072	2122	2187	2261	2345	2379	2411	2447	2475	2506	2531	2508	2432	2339	2235	2122	1987
40	1872	1898	1936	1988	2055	2138	2239	2359	2508	2593	2644	2676	2689	2681	2587	2455	2314	2166	1994
45	1729	1755	1795	1846	1916	2001	2110	2246	2410	2602	2804	2832	2838	2809	2743	2586	2402	2201	1977
50	1294	1338	1409	1505	1635	1799	1963	2101	2274	2474	2711	2993	3066	3040	2967	2790	2537	2253	1953
55	853	893	957	1045	1164	1320	1517	1770	2081	2322	2602	2941	3309	3359	3249	3058	2697	2302	1898
60	411	445	499	575	677	815	996	1231	1533	1941	2487	2892	3267	3613	3481	3221	2758	2230	1727
65	310	322	339	360	386	419	466	641	915	1303	1862	2576	3006	3226	3369	2957	2505	1892	1347
70	215	225	240	259	279	305	341	390	467	587	1036	1570	2084	2157	1962	1578	1340	890	633
75	120	128	141	156	170	185	206	236	289	380	515	605	795	718	501	351	271	211	189
80	0.89	3.74	9.09	17.3	28.2	41.3	56.3	73.2	95.3	128	198	268	255	155	118	80.3	68.3	67.0	75.9
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	29.7	62.9	63.9	53.5	39.5	31.2	37.2
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	27.7	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

Table--3

UNIT: cd

C(DEC) γ (DEC)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
5	1757	1747	1737	1727	1717	1708	1699	1690	1682	1675	1668	1662	1658	1655	1653	1651	1650	1650	1650
10	1760	1739	1718	1697	1676	1656	1637	1619	1603	1588	1576	1563	1553	1545	1539	1536	1535	1534	1538
15	1777	1742	1707	1673	1640	1608	1577	1550	1525	1501	1479	1461	1449	1435	1427	1421	1419	1420	1424
20	1796	1745	1695	1648	1600	1557	1517	1476	1442	1406	1380	1352	1331	1316	1304	1296	1294	1296	1301
25	1816	1746	1680	1616	1554	1498	1440	1388	1342	1300	1265	1237	1211	1192	1179	1171	1168	1171	1179
30	1836	1742	1655	1567	1489	1411	1344	1283	1230	1184	1146	1113	1088	1067	1053	1045	1043	1046	1055
35	1853	1725	1607	1498	1396	1308	1227	1159	1104	1056	1007	965	931	906	888	878	875	880	893
40	1825	1664	1517	1387	1272	1172	1087	1014	945	887	835	793	760	736	718	710	707	713	725
45	1760	1558	1388	1239	1111	1004	915	834	767	707	658	615	584	561	548	541	539	545	556
50	1667	1420	1218	1048	913	810	720	643	575	520	492	478	468	462	459	457	458	460	465
55	1520	1228	992	817	707	604	511	443	432	419	407	397	387	381	378	376	376	377	381
60	1292	972	718	603	494	390	370	357	345	333	321	313	306	299	296	294	294	295	296
65	940	625	498	391	325	308	290	276	262	250	248	248	245	239	236	235	235	235	236
70	460	354	280	251	245	232	215	209	208	207	204	201	194	184	178	176	175	176	178
75	173	168	164	166	163	163	155	155	160	163	161	157	145	130	120	117	116	117	120
80	88.3	97.3	101	103	98.9	94.9	91.9	85.7	73.7	60.0	43.5	29.2	17.2	8.64	3.57	0.87	0.00	0.87	3.55
85	41.0	46.0	42.1	21.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.1V I:0.2200A P:49.90W PF:0.9790 Lamp Flux:6342.94x1 lm		
NAME: RC-50W-NW	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	PROTECTION ANGLE:

Table--4

UNIT: cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766				
5	1652	1656	1661	1666	1672	1679	1686	1694	1703	1712	1722	1732	1742	1752	1763				
10	1543	1549	1559	1570	1583	1598	1613	1630	1648	1668	1689	1711	1732	1753	1775				
15	1431	1443	1459	1476	1496	1519	1545	1572	1601	1633	1664	1696	1731	1765	1799				
20	1313	1331	1351	1376	1406	1441	1474	1513	1552	1596	1641	1687	1735	1783	1831				
25	1194	1213	1239	1270	1305	1346	1393	1444	1500	1556	1615	1677	1742	1806	1871				
30	1073	1095	1124	1158	1199	1246	1300	1361	1429	1503	1580	1661	1746	1833	1921				
35	914	943	982	1029	1083	1135	1194	1260	1340	1429	1525	1629	1739	1857	1980				
40	746	774	812	859	917	985	1064	1140	1224	1323	1436	1567	1712	1870	2033				
45	575	600	635	681	738	805	882	973	1075	1181	1309	1458	1628	1821	2026				
50	472	482	494	513	544	608	682	772	874	992	1131	1305	1510	1749	2018				
55	387	396	408	421	438	454	472	550	655	776	912	1096	1338	1625	1981				
60	301	309	318	328	342	359	375	394	424	547	682	834	1101	1439	1894				
65	240	245	249	249	249	264	282	302	327	353	441	592	778	1143	1631				
70	184	194	201	204	206	207	207	212	236	260	276	330	469	690	1055				
75	128	143	155	160	162	160	153	152	161	171	176	184	195	235	304				
80	8.53	16.9	29.0	43.2	59.8	74.7	83.8	87.2	89.8	97.2	102	107	106	105	108				
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	19.6	40.3	48.1	48.4	49.9				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity:65.0%
Test Distance:9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1766	1770	1774	1778	1782	1785	1788	1792	1795	1797
5.0	1773	1781	1789	1797	1804	1811	1818	1824	1830	1835
7.5	1779	1792	1804	1816	1827	1838	1848	1858	1867	1874
10.0	1796	1812	1828	1843	1858	1871	1883	1893	1904	1913
12.5	1811	1832	1852	1871	1889	1905	1921	1935	1947	1958
15.0	1832	1857	1882	1905	1926	1945	1961	1977	1992	2004
17.5	1853	1884	1913	1941	1967	1990	2008	2026	2039	2051
20.0	1878	1915	1950	1982	2011	2037	2058	2078	2092	2106
22.5	1905	1949	1989	2027	2060	2089	2114	2134	2148	2163
25.0	1934	1986	2034	2078	2115	2147	2173	2194	2186	2175
27.5	1969	2029	2085	2135	2176	2210	2240	2235	2221	2208
30.0	2007	2078	2142	2198	2244	2285	2294	2278	2262	2242
32.5	2048	2132	2207	2273	2327	2364	2346	2325	2303	2282
35.0	2101	2200	2288	2363	2422	2432	2406	2376	2347	2319
37.5	2157	2273	2379	2469	2532	2508	2472	2435	2397	2360
40.0	2198	2331	2456	2562	2622	2590	2544	2497	2450	2373
42.5	2221	2372	2514	2640	2689	2664	2620	2563	2482	2314
45.0	2236	2414	2576	2719	2745	2733	2692	2632	2422	2247
47.5	2267	2475	2662	2802	2817	2805	2765	2585	2357	2170
50.0	2300	2548	2773	2901	2917	2899	2794	2514	2275	2082
52.5	2330	2630	2893	3013	3039	3015	2731	2425	2181	1984
55.0	2360	2715	3030	3146	3170	3061	2657	2329	2072	1861
57.5	2395	2814	3180	3280	3324	2991	2568	2217	1936	1606
60.0	2414	2895	3281	3419	3421	2912	2462	2091	1665	1335
62.5	2376	2931	3335	3522	3326	2811	2337	1809	1373	1051
65.0	2281	2888	3311	3571	3155	2678	2076	1483	1058	752.0
67.5	2068	2668	3105	3310	2879	2456	1696	1123	721.1	437.8
70.0	1675	2159	2594	2678	2468	1930	1254	721.4	402.2	347.1
72.5	1017	1300	1694	1775	1795	1334	741.9	403.6	332.2	284.0
75.0	465.3	506.7	724.6	823.3	1046	701.9	382.9	320.6	258.4	217.8
77.5	202.6	204.6	271.8	350.8	440.6	320.1	283.0	231.7	181.1	149.2
80.0	108.8	103.8	110.0	154.9	160.0	212.6	182.2	137.4	100.4	79.24
82.5	75.70	76.30	82.20	89.96	100.2	112.1	80.89	51.65	29.14	10.75
85.0	55.84	58.36	61.75	64.09	54.95	24.65	0	0	0	0
87.5	43.90	46.45	39.75	0	0	0	0	0	0	0
90.0	39.27	0	0	0	0	0	0	0	0	0
G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1800	1802	1804	1805	1807	1809	1811	1812	1813	1813
5.0	1839	1843	1847	1849	1852	1854	1856	1858	1859	1859
7.5	1881	1887	1891	1895	1897	1900	1902	1904	1906	1906
10.0	1923	1930	1936	1941	1944	1946	1948	1950	1952	1953
12.5	1966	1975	1982	1988	1992	1993	1994	1997	1999	2000
15.0	2014	2022	2029	2035	2039	2042	2041	2044	2046	2047
17.5	2063	2070	2075	2072	2068	2067	2062	2061	2063	2066
20.0	2105	2102	2096	2092	2088	2084	2081	2078	2080	2084
22.5	2136	2126	2121	2114	2108	2103	2100	2095	2098	2102
25.0	2164	2155	2142	2136	2127	2122	2118	2113	2115	2119
27.5	2195	2180	2168	2158	2149	2141	2135	2130	2132	2137
30.0	2225	2210	2193	2179	2170	2159	2151	2148	2150	2155
32.5	2258	2238	2219	2203	2157	2117	2092	2078	2078	2086
35.0	2293	2266	2198	2134	2084	2046	2019	2005	2005	2015
37.5	2310	2208	2128	2061	2010	1972	1945	1932	1933	1944
40.0	2245	2141	2055	1989	1937	1898	1872	1859	1861	1872
42.5	2177	2070	1981	1913	1862	1822	1797	1785	1788	1801
45.0	2102	1990	1901	1835	1784	1747	1722	1712	1716	1729
47.5	2022	1909	1821	1754	1663	1584	1528	1499	1496	1515
50.0	1935	1820	1686	1546	1440	1362	1308	1279	1276	1294
52.5	1837	1624	1455	1319	1217	1140	1088	1059	1056	1074
55.0	1597	1384	1217	1087	989.5	916.1	866.7	839.6	836.2	852.8
57.5	1342	1138	976.7	851.9	759.6	691.5	645.0	619.6	616.2	631.9
60.0	1079	882.6	730.0	614.6	528.4	465.7	423.2	399.5	396.1	410.7
62.5	806.8	620.8	478.8	383.4	369.2	358.1	350.8	346.9	349.5	356.9
65.0	524.3	380.3	355.2	337.8	323.6	312.3	305.0	300.8	302.8	309.6
67.5	363.7	331.7	309.0	292.1	278.0	266.5	259.1	254.9	256.2	262.3
70.0	309.8	281.7	262.1	246.4	232.5	220.8	213.3	208.9	209.5	214.8
72.5	253.4	231.0	214.5	200.6	187.1	175.0	167.5	163.0	162.9	167.3
75.0	195.0	179.4	166.4	154.7	141.6	129.3	121.6	117.1	116.2	119.8
77.5	134.6	126.7	112.3	97.24	82.52	70.47	63.21	59.12	58.11	60.47
80.0	66.15	53.16	38.82	26.23	15.84	8.322	3.556	0.8689	0	0.8889
82.5	0	0	0	0	0	0	0	0	0	0
85.0	0	0	0	0	0	0	0	0	0	0

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1813	1812	1811	1810	1808	1805	1803	1800	1796	1793
5.0	1859	1858	1855	1852	1850	1846	1843	1839	1834	1829
7.5	1905	1903	1901	1898	1895	1891	1887	1881	1873	1865
10.0	1952	1950	1948	1945	1944	1937	1930	1921	1913	1904
12.5	2000	1997	1996	1996	1989	1982	1976	1969	1959	1947
15.0	2047	2044	2049	2042	2037	2033	2027	2018	2007	1995
17.5	2067	2072	2077	2080	2087	2087	2080	2071	2062	2048
20.0	2086	2094	2098	2105	2115	2121	2129	2130	2118	2104
22.5	2105	2113	2120	2132	2143	2153	2165	2174	2179	2164
25.0	2125	2135	2144	2159	2171	2189	2202	2213	2227	2232
27.5	2143	2157	2170	2187	2205	2222	2241	2260	2271	2285
30.0	2159	2178	2196	2213	2239	2262	2285	2304	2326	2342
32.5	2106	2140	2189	2246	2273	2299	2330	2358	2382	2408
35.0	2038	2072	2122	2187	2261	2345	2379	2411	2447	2475
37.5	1969	2004	2054	2119	2199	2296	2407	2474	2515	2558
40.0	1898	1936	1988	2055	2138	2239	2359	2508	2593	2644
42.5	1827	1866	1919	1987	2072	2176	2304	2459	2645	2722
45.0	1755	1795	1846	1916	2001	2110	2246	2410	2602	2804
47.5	1560	1632	1730	1842	1929	2038	2175	2347	2543	2765
50.0	1338	1409	1505	1635	1799	1963	2101	2274	2474	2711
52.5	1116	1184	1277	1402	1563	1768	2019	2191	2401	2659
55.0	892.6	957.0	1045	1164	1320	1517	1770	2081	2322	2602
57.5	669.0	728.5	811.4	922.5	1070	1260	1506	1815	2220	2545
60.0	444.7	498.6	574.8	677.4	814.9	995.9	1231	1533	1941	2487
62.5	369.9	387.7	410.0	437.7	553.6	721.3	941.5	1234	1635	2199
65.0	321.7	338.7	359.9	385.9	419.1	466.0	640.9	915.0	1303	1862
67.5	273.3	289.5	309.7	333.1	362.9	404.6	462.1	577.2	938.0	1478
70.0	224.9	240.2	259.0	279.5	305.1	340.7	390.1	466.9	586.6	1036
72.5	176.3	190.6	207.7	225.0	245.6	274.3	315.0	381.3	488.7	664.4
75.0	127.7	140.9	155.9	169.9	185.0	205.9	236.1	289.3	379.9	514.5
77.5	66.37	76.92	90.38	104.7	119.6	135.2	154.0	191.6	259.4	356.5
80.0	3.736	9.092	17.35	28.22	41.31	56.35	73.17	95.34	127.8	198.5
82.5	0	0	0	0	0	0	0	12.98	36.37	69.37
85.0	0	0	0	0	0	0	0	0	0	0
87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1790	1787	1783	1780	1776	1772	1768	1763	1758	1753
5.0	1823	1817	1810	1802	1794	1786	1778	1768	1757	1747
7.5	1856	1846	1836	1825	1814	1802	1790	1774	1758	1742
10.0	1893	1881	1867	1852	1836	1820	1802	1781	1760	1739
12.5	1933	1919	1903	1886	1866	1846	1824	1797	1769	1740
15.0	1981	1964	1944	1922	1898	1872	1845	1811	1777	1742
17.5	2030	2011	1987	1961	1932	1902	1869	1828	1785	1743
20.0	2084	2062	2036	2006	1972	1935	1896	1847	1796	1745
22.5	2147	2120	2089	2055	2016	1972	1925	1867	1807	1748
25.0	2211	2187	2153	2110	2064	2011	1954	1885	1816	1746
27.5	2289	2260	2222	2175	2119	2056	1989	1908	1825	1745
30.0	2358	2344	2300	2247	2183	2109	2027	1932	1836	1742
32.5	2424	2440	2399	2340	2262	2170	2071	1959	1847	1738
35.0	2506	2531	2508	2432	2339	2235	2122	1987	1853	1725
37.5	2596	2615	2608	2517	2406	2282	2151	1998	1846	1700
40.0	2676	2689	2681	2587	2455	2314	2166	1994	1825	1664
42.5	2754	2760	2734	2653	2511	2351	2180	1985	1795	1616
45.0	2832	2838	2809	2743	2586	2402	2201	1977	1760	1558
47.5	2930	2938	2913	2850	2681	2463	2224	1966	1719	1495
50.0	2993	3066	3040	2967	2790	2537	2253	1953	1667	1420
52.5	2967	3215	3194	3104	2924	2619	2283	1932	1601	1332
55.0	2941	3309	3359	3249	3058	2697	2302	1898	1520	1228
57.5	2909	3305	3523	3379	3173	2754	2288	1834	1413	1111
60.0	2892	3267	3613	3481	3221	2758	2230	1727	1292	971.5
62.5	2862	3174	3483	3500	3167	2700	2113	1570	1132	809.0
65.0	2576	3006	3226	3369	2957	2505	1892	1347	940.4	624.7
67.5	2102	2697	2809	2839	2456	2099	1519	1053	720.0	476.9
70.0	1570	2084	2157	1962	1578	1340	889.7	632.6	459.7	354.1
72.5	1001	1438	1315	1066	759.1	621.9	429.4	328.8	254.0	238.1
75.0	605.1	795.1	718.2	501.3	351.1	271.5	210.8	188.9	172.6	168.5
77.5	437.8	406.7	334.6	237.5	151.3	121.1	108.8	114.6	122.7	130.3

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

80.0	268.2	255.3	154.7	118.2	80.31	68.30	67.05	75.85	88.33	97.25
82.5	106.8	132.4	101.9	79.41	63.99	47.73	42.81	50.20	60.00	68.77
85.0	0	29.69	62.85	63.95	53.47	39.52	31.24	37.15	41.02	45.95
87.5	0	0	0	0	38.03	38.37	28.02	35.78	30.09	0
90.0	0	0	0	0	0	0	27.70	0	0	0
G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1748	1743	1738	1733	1729	1725	1722	1719	1717	1715
5.0	1737	1727	1717	1708	1699	1690	1682	1675	1668	1662
7.5	1726	1710	1696	1681	1668	1655	1643	1632	1622	1613
10.0	1718	1697	1676	1656	1637	1619	1603	1588	1576	1563
12.5	1712	1683	1656	1632	1608	1585	1563	1544	1527	1513
15.0	1707	1673	1640	1608	1577	1550	1525	1501	1479	1461
17.5	1701	1660	1622	1583	1548	1514	1483	1459	1432	1409
20.0	1695	1648	1600	1557	1517	1476	1442	1406	1380	1352
22.5	1689	1633	1579	1529	1481	1436	1392	1355	1321	1296
25.0	1680	1616	1554	1498	1440	1388	1342	1300	1265	1237
27.5	1668	1594	1524	1458	1394	1338	1287	1245	1206	1174
30.0	1655	1567	1489	1411	1344	1283	1230	1184	1146	1113
32.5	1634	1539	1446	1362	1287	1225	1169	1121	1082	1049
35.0	1607	1498	1396	1308	1227	1159	1104	1056	1007	965.3
37.5	1566	1448	1339	1243	1162	1090	1030	973.0	921.7	880.2
40.0	1517	1387	1272	1172	1087	1014	944.7	887.4	835.5	792.9
42.5	1457	1318	1196	1093	1005	926.4	856.9	798.5	748.0	704.8
45.0	1388	1239	1111	1004	914.5	834.5	766.7	707.3	658.4	615.3
47.5	1308	1149	1016	909.0	819.3	740.3	673.0	614.1	567.0	524.9
50.0	1218	1048	913.5	809.9	720.3	642.5	575.2	519.8	492.4	478.4
52.5	1112	935.2	812.0	708.7	617.7	540.9	475.7	462.0	450.0	438.0
55.0	992.4	817.2	707.0	604.0	511.5	443.0	431.5	419.5	406.9	396.9
57.5	856.4	710.2	602.0	497.8	410.5	399.6	388.3	375.7	364.1	355.1
60.0	717.9	603.2	494.4	390.4	369.9	357.2	345.4	332.6	321.5	312.9
62.5	607.7	498.0	387.8	346.4	329.9	315.5	303.3	290.0	278.5	271.4
65.0	497.5	390.9	324.7	307.8	290.3	275.5	261.9	250.3	248.4	247.6
67.5	388.8	295.0	285.8	269.5	251.7	236.4	230.9	226.7	226.3	224.3
70.0	280.3	251.1	244.8	232.0	215.3	208.7	207.9	206.8	204.4	201.4
72.5	201.3	207.7	202.7	196.5	186.0	182.0	184.2	185.0	182.7	178.8
75.0	164.3	165.9	163.3	162.7	155.4	155.0	159.7	163.1	161.0	156.6
77.5	132.8	131.4	129.7	128.9	124.0	127.3	134.7	141.3	125.9	108.3
80.0	101.3	103.4	98.93	94.86	91.93	85.70	73.74	59.99	43.52	29.22
82.5	72.62	75.72	67.94	45.21	27.63	11.55	0	0	0	0
85.0	42.07	21.53	0	0	0	0	0	0	0	0
87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	250.0	255.0	260.0	265.0	270.0	275.0	280.0	285.0	290.0	295.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1713	1711	1709	1709	1708	1708	1708	1708	1709	1711
5.0	1658	1655	1653	1651	1650	1650	1650	1652	1656	1661
7.5	1606	1599	1596	1593	1592	1592	1593	1598	1603	1610
10.0	1553	1545	1539	1536	1535	1534	1538	1543	1549	1559
12.5	1501	1491	1483	1478	1477	1477	1481	1487	1496	1508
15.0	1449	1435	1427	1421	1419	1420	1424	1431	1443	1459
17.5	1390	1377	1366	1358	1356	1358	1362	1373	1388	1407
20.0	1331	1316	1304	1296	1294	1296	1301	1313	1331	1351
22.5	1271	1254	1242	1234	1231	1234	1241	1254	1273	1295
25.0	1211	1192	1179	1171	1168	1171	1179	1194	1213	1239
27.5	1151	1130	1117	1108	1105	1109	1117	1135	1154	1182
30.0	1088	1067	1053	1045	1043	1046	1055	1073	1095	1124
32.5	1016	989.9	972.3	962.2	958.8	963.5	975.6	997.5	1026	1063
35.0	930.7	906.4	887.9	878.2	875.0	879.8	892.6	913.7	943.4	982.0
37.5	846.1	821.9	803.3	794.0	791.1	796.2	809.1	829.6	860.2	897.4
40.0	759.7	735.7	718.4	709.7	707.2	712.5	725.3	745.6	773.8	812.0
42.5	672.4	648.7	633.2	625.3	623.3	628.7	641.0	660.6	687.3	724.0
45.0	584.3	561.5	547.7	540.9	539.4	544.7	556.4	574.8	600.0	634.5
47.5	508.7	502.3	499.3	498.2	498.5	501.5	506.8	515.3	524.7	543.6
50.0	468.0	461.8	458.7	457.4	457.5	460.1	464.9	472.3	482.1	494.3
52.5	427.7	421.3	418.2	416.5	416.6	418.8	422.9	429.4	439.0	451.4
55.0	387.0	380.6	377.5	375.6	375.6	377.4	380.8	386.6	395.8	407.6
57.5	346.3	339.9	336.8	334.7	334.7	336.0	338.7	344.0	352.5	362.9
60.0	305.5	299.3	296.0	293.9	293.7	294.5	296.4	301.4	309.0	317.9
62.5	270.6	267.1	265.1	264.1	264.2	264.5	265.2	268.2	271.9	273.2
65.0	244.9	239.4	236.1	234.7	234.6	235.0	236.1	240.0	245.5	248.6
67.5	219.4	211.8	207.1	205.4	205.0	205.5	207.1	211.8	219.4	224.5
70.0	194.4	184.3	178.2	176.0	175.4	176.0	178.1	183.8	193.7	201.1

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

72.5	169.6	157.0	149.3	146.7	145.9	146.5	149.1	156.0	168.2	178.1
75.0	145.0	129.8	120.5	117.4	116.3	117.0	120.1	128.3	143.0	155.4
77.5	89.66	73.04	63.42	59.45	58.15	59.25	63.19	72.10	88.13	107.3
80.0	17.24	8.636	3.567	0.8739	0	0.8709	3.554	8.528	16.94	28.97
82.5	0	0	0	0	0	0	0	0	0	0
85.0	0	0	0	0	0	0	0	0	0	0
87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	1766	1766	1766	1766	1766	1766	1766	1766	1766	1766
2.5	1713	1717	1720	1724	1728	1732	1736	1741	1746	1751
5.0	1666	1672	1679	1686	1694	1703	1712	1722	1732	1742
7.5	1618	1627	1638	1650	1662	1676	1689	1703	1718	1733
10.0	1570	1583	1598	1613	1630	1648	1668	1689	1711	1732
12.5	1523	1540	1557	1578	1601	1625	1650	1676	1702	1730
15.0	1476	1496	1519	1545	1572	1601	1633	1664	1696	1731
17.5	1427	1453	1481	1510	1544	1577	1615	1652	1692	1732
20.0	1376	1406	1441	1474	1513	1552	1596	1641	1687	1735
22.5	1324	1358	1394	1435	1481	1528	1576	1628	1682	1738
25.0	1270	1305	1346	1393	1444	1500	1556	1615	1677	1742
27.5	1215	1254	1298	1348	1404	1466	1533	1599	1670	1743
30.0	1158	1199	1246	1300	1361	1429	1503	1580	1661	1746
32.5	1100	1142	1192	1250	1314	1386	1469	1559	1650	1744
35.0	1029	1083	1135	1194	1260	1340	1429	1525	1629	1739
37.5	944.6	1002	1070	1132	1204	1287	1379	1485	1602	1729
40.0	858.9	917.5	984.5	1064	1140	1224	1323	1436	1567	1712
42.5	771.4	829.6	895.4	975.0	1065	1154	1257	1379	1520	1677
45.0	681.0	737.6	804.8	881.9	972.5	1075	1181	1309	1458	1628
47.5	589.4	643.2	708.1	784.3	874.6	977.4	1091	1225	1386	1574
50.0	513.0	544.5	607.5	682.3	771.7	873.7	991.6	1131	1305	1510
52.5	467.4	484.7	503.1	576.0	662.9	765.6	886.2	1026	1209	1430
55.0	421.5	437.5	454.0	472.1	550.5	654.6	776.2	912.0	1096	1338
57.5	375.0	389.6	406.1	423.7	441.3	540.5	663.8	798.7	968.1	1228
60.0	327.8	341.8	358.6	375.4	394.3	424.5	547.0	681.8	834.1	1101
62.5	280.7	293.9	311.3	328.2	347.8	373.1	428.2	563.4	715.5	954.1
65.0	248.8	249.4	264.1	281.5	301.6	327.4	352.9	441.0	591.9	777.7
67.5	226.3	227.5	230.2	235.4	255.7	281.4	306.9	326.0	462.6	617.3
70.0	204.0	205.9	207.3	207.0	212.4	236.0	260.2	276.4	329.6	468.9
72.5	182.0	184.1	184.0	180.3	182.7	195.1	213.7	225.7	237.2	322.2
75.0	160.2	162.3	160.2	153.1	152.0	160.8	171.0	175.6	183.8	195.3
77.5	124.9	140.5	136.0	125.2	120.0	125.5	133.2	134.4	141.1	143.7
80.0	43.16	59.76	74.75	83.81	87.16	89.81	97.24	102.1	106.6	105.8
82.5	0	0	0	11.27	26.11	41.69	61.80	70.95	74.30	73.88
85.0	0	0	0	0	0	0	0	19.63	40.26	48.07
87.5	0	0	0	0	0	0	0	0	0	0
90.0	0	0	0	0	0	0	0	0	0	0
G/C	350.0	355.0								
0.0	1766	1766								
2.5	1756	1761								
5.0	1752	1763								
7.5	1748	1764								
10.0	1753	1775								
12.5	1757	1784								
15.0	1765	1799								
17.5	1773	1813								
20.0	1783	1831								
22.5	1794	1850								
25.0	1806	1871								
27.5	1819	1895								
30.0	1833	1921								
32.5	1843	1946								
35.0	1857	1980								
37.5	1869	2014								
40.0	1870	2033								
42.5	1850	2033								
45.0	1821	2026								
47.5	1789	2024								
50.0	1749	2018								
52.5	1696	2006								
55.0	1625	1981								
57.5	1537	1949								
60.0	1439	1894								
62.5	1309	1792								

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

Photometric Data Table [cd]

65.0	1143	1631
67.5	935.7	1393
70.0	690.2	1055
72.5	399.9	606.7
75.0	235.4	303.8
77.5	160.1	176.1
80.0	105.2	108.3
82.5	72.60	74.90
85.0	48.44	49.88
87.5	29.62	37.46
90.0	0	0

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-07

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.265
Humidity: 65.0%
Test Distance: 9.500m [K=1.0000]
Remarks: